

## FMC FLUSH MOUNT COMPACT 7" (CCT5)

PROJECT: \_\_\_\_\_

SCHEDULE: \_\_\_\_\_ DATE: \_\_\_\_\_

PREPARE BY: \_\_\_\_\_

NOTES: \_\_\_\_\_

### DESCRIPTION

naturaLED® Compact Flush Mounts (FMC) are an excellent replacement solution for traditional incandescent and fluorescent ceiling and wall mounted fixtures. Our FMC series is easy to install, dimmable, and wet location rated. The FMC is available in 2 models; a 3000K version, or CCT5 Selectable: 2700K, 3000K, 3500K, 4000K, 5000K. Perfect for residential, commercial and hospitality applications. Ideal for bathrooms, closets, small rooms, storage areas, hallways and stairways.



### APPLICATIONS

Bathroom, Decoration, Hallway, Bedroom, Ceiling Mount



**Rated Life 50,000 Hours**  
**Warranty 5 Years**

### FEATURES

- Wet Location
- UL Listed
- Color Temp: 5 CCT (2700K,3000K,3500K,4000K,5000K), 3000K
- Voltage: 120V
- Powerfactor >0.9
- Surge Protection: 2.5KV
- Beam Angle: Flood
- Dimmable: Incandescent dimming
- CRI: >90
- Operating temperature: - 4°F - 104°F
- Uniform light distribution and consistent color
- Recommended ceiling height: 8-10ft
- Color: White
- 5 Year Warranty
- Optional Accessory for purchase: Emergency Driver

### ACCESSORIES (INCLUDED)



Recessed can installation kit



Emergency Driver

SAMPLE NUMBER		LED7FMC-96L9CCT5			
STYLE	DIAMETER	SERIES	LUMEN	CRI	COLOR TEMP
LED	7	FMC	96L	9	CCT5
LED Lighting	7 inch	Flush Mount Compact	960 Lumens	CRI 90	5 Selectable Color Temp



# FLUSH MOUNT COMPACT 7" (CCT5)

CEILING & AREA LUMINAIRES

## ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Size	Wet Location
12	9522	LED7FMC-96L930	3000K	960	100	7"	•
12	9523	LED7FMC-96L9CCT5	5CCT(27/30/35/40/50K)	960	100	7"	•

## ACCESSORIES (INCLUDED)

### Installation Kit

(Recessed can installation kit)



Wire Nut X3PCS



For Mounting Plate



Torsion springs



E26 Adapter



Mounting Plate

## ACCESSORIES (Ordered Separately)

### Emergency Driver




7337 BAEM25-170BC/347-C  
(25W Micro Inverter 120-247V with 12" Conduit)

## DIMENSIONS


### 12W (7-inch)

0.53-lbs

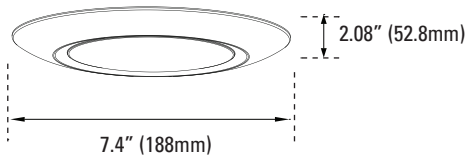


### 12W (7-inch) CCT5

0.55-lbs

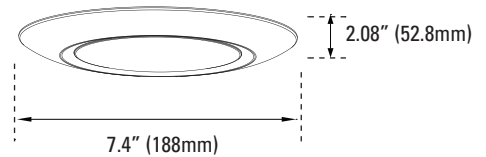


## PHOTOMETRIC CHART

### 12W (7-inch)



### 12W (7-inch) CCT5



**Illuminance at a Distance**

Center Beam fc	Beam Width	
1.7R	116 fc	5.1 ft 5.1 ft
3.3R	30.8 fc	9.8 ft 9.9 ft
5.0R	13.4 fc	14.9 ft 15.0 ft
6.7R	7.47 fc	20.0 ft 20.0 ft
9.3R	4.86 fc	24.8 ft 24.8 ft
10.0R	3.35 fc	29.8 ft 29.9 ft

■ Vert. Spread: 112.3°  
■ Horiz. Spread: 112.5°

**Illuminance at a Distance**

Center Beam fc	Beam Width	
1.7R	116 fc	5.0 ft 5.1 ft
3.3R	30.8 fc	9.8 ft 9.8 ft
5.0R	13.4 fc	14.8 ft 14.9 ft
6.7R	7.47 fc	19.9 ft 20.0 ft
9.3R	4.87 fc	24.6 ft 24.7 ft
10.0R	3.35 fc	29.6 ft 29.8 ft

■ Vert. Spread: 112.0°  
■ Horiz. Spread: 112.3°

## PACKAGE

Case Qty  
20 pcs

