

DESCRIPTION

These LED lamps directly replace 2G11 PL-L fluorescent tubes, offering an easy efficiency upgrade without modifying existing fixtures. Ballast compatible (Type A) or Ballast Bypass (Type B) hybrid design lets them run on most fluorescent ballasts or in bypass mode on 120–277V line voltage for maximum installation flexibility. With CCT5 field-selectable technology (3000K–6500K) and an optimized optical design, they deliver even, consistent illumination across a wide range of applications. Durable and energy-efficient, they provide long service life, reduced maintenance, and dependable performance.


APPLICATIONS

Recessed Can, Sconces, Ceiling Fixtures



Rated Life Hours 50,000
Warranty 5 Years

FEATURES
SOCKET

- DLC Standard
- UL/cUL Listed
- Damp Location
- Color Selectable
- Type A + B Hybrid Technology

- Wattage: 16~24W
- Color Temp: CCT5(30/35/40/50/65K)
- Voltage: 120-277V, PLL Ballast*
- Dimmable: Yes**
- CRI: >80
- Operating Temperature: - 4°F to 104°F (-20°C to 45°C)
- Base: 2G11
- Beam Distribution: 160°
- Material: Glass PET Coating
- Lens: Frosted
- 5 Year Warranty
- 50,000 hrs rated average life

2G11


*For ballast compatibility, please visit our website: www.naturaLED.com

**For Type B with dimming model

SAMPLE NUMBER LED24PLL/320L/2G11/8C5/AB						
STYLE	WATTAGE	SERIES	LUMENS	BASE	CRI/COLOR TEMP	TYPE
LED	24 24 Watt	PLL Plug-in Long	320L <3,200 Lumens	2G11 2G11 Socket	8C5 CRI 80 CCT5 (30/35/40/50/65K)	AB Ballast & Bypass Compatible



ORDERING

*P= Premium DLC / *S = Standard DLC


Ordering Code	Description	Watts (W)	Lumens (Lm)	CCT (K)	Equiv. Watt (W)	Position	Beam Angle	DLC (S/P)
2G11								
4677	LED16PLL/200L/2G11/8C5/AB	16	2,000 (30/35/40/50/65K)	5CCT (16.6")	36W	Horizontal	160°	S
4678	LED17PLL/200L/2G11/8C5/AB	17	2,200 (30/35/40/50/65K)	5CCT (22.4")	40W	Horizontal	160°	S
4679	LED24PLL/320L/2G11/8C5/AB	24	3,200 (30/35/40/50/65K)	5CCT (21.1")	55W	Horizontal	160°	S

DIMENSIONS



2G11

0.25-lbs

(4679) 22.2in (565mm)
 (4678) 21in (535mm)
 (4677) 16.3in (415mm)

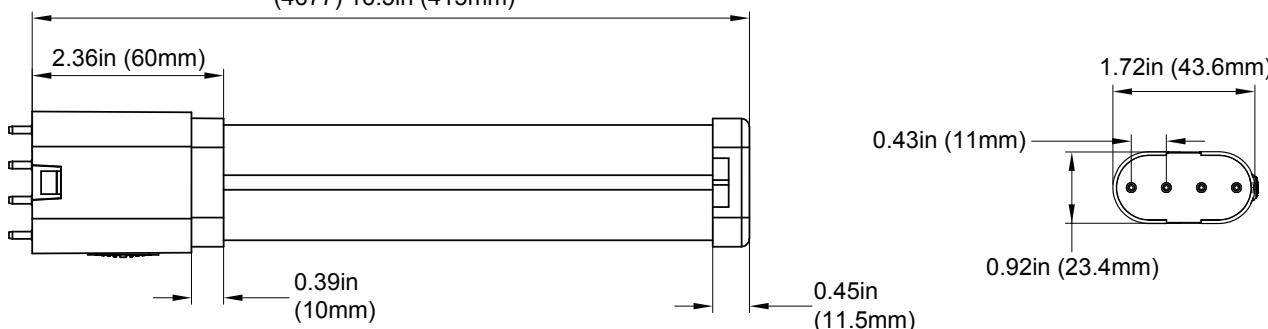


(4679) 20.2in (513.5mm)
 (4678) 19in (483.5mm)
 (4677) 14.3in (363.5mm)

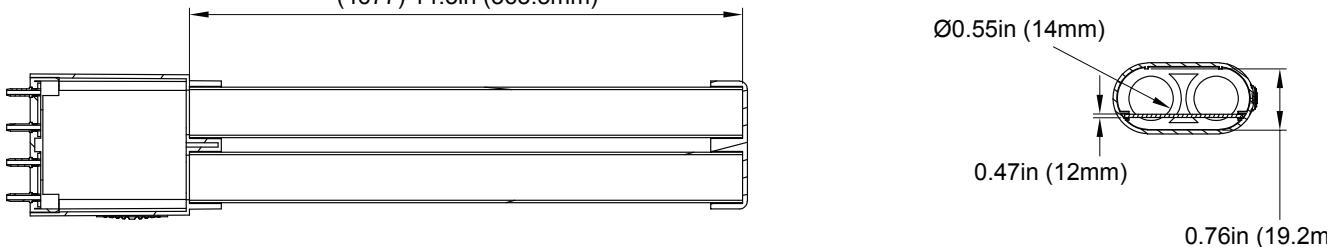


WIRING DIAGRAM

TYPE A - WIRING DIAGRAM

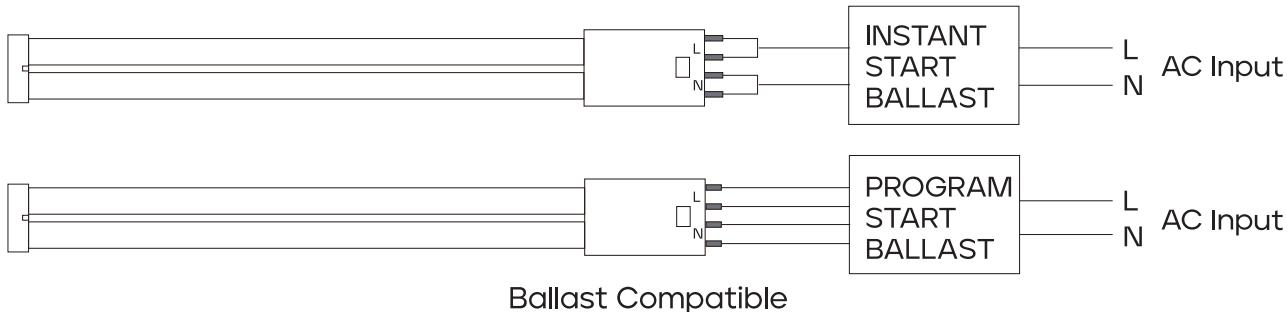

Ballast Compatible

TYPE B - WIRING DIAGRAM

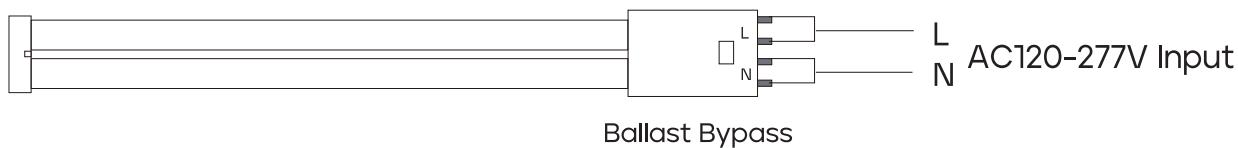

Ballast Bypass

PACKAGE

item #	Master Carton (pc)	Dimensions (in)	Weight (lb)
4677	25	17.5" x 9.6" x 5.7"	8.88
4678	25	23.4" x 9.6" x 5.7"	12.2
4679	25	22.2" x 9.6" x 5.7"	11.30

