

<b>PROJECT:</b>	
<b>SCHEDULE:</b>	<b>DATE:</b>
<b>PREPARE BY:</b>	
<b>NOTES:</b>	

**RL RETROFIT DOWNLIGHT CRI 80 CRI 90**

### DESCRIPTION

Our RL retrofit downlights are designed as energy-efficient lighting solution replacements for 50 watt and 90 watt incandescent lamps in the industry's most popular 4-inch and 5/6-inch recessed downlight fixtures. Easy installation and certified Air-Tight, our retrofit recess cans are dimmable and come with built-in power connector. The torsion clips are adjustable to easily fit the recessed can at 5-inch or 6-inch. Optional color trims in Bronze, Chrome, and Black are available.



**Rated Life** 35,000/50,000 Hours  
**Warranty** 3 / 5 Years

### APPLICATIONS

Bathroom, Over Mirror, Accent, Residential, Hospitalityes

### FEATURES

- For Damp Location
- Color Temp: 2700K, 3000K, 4000K, 5000K
- Voltage: 120V
- Powerfactor >0.9
- Dimmable
- Beam Angle: Flood
- CRI: 80 / CRI: 90
- Operating temperature: - 4°F - 104°F
- Uniform light distribution and consistent color
- Built-in power connector with adjustable torision clips
- Color: White
- 3 / 5 Year Warranty
- Optional for Purchase: GU24 Base, Trims

### ACCESSORIES

	GU24 Base
	Trim Options
	E26 Base (Included)

**SAMPLE NUMBER** LED4RL9-54L930

STYLE	DIAMETER	SERIES	WATTAGE	LUMEN	CRI	COLOR TEMP
LED	4	RL	9	54L	9	30
LED Lighting	4 inch	Commercial Downlight	9 Watt	540 Lumens	CRI 90	3000K



# DOWNLIGHT CRI80/CRI90

CEILING & AREA LUMINAIRES

## ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Size	CRI	Equiv. Wattage (W)	Rated Hours/Warranty	Wet/Damp Location
9	<b>7172</b>	LED-4RL-56L40K	4000K	560	4"	80	50	35,000/3	D
9	<b>7173</b>	LED-4RL-56L50K	5000K	560	4"	80	50	35,000/3	D
9	<b>7567</b>	LED4RL-65L850	5000K	650	4"	80	60	50,000/5	W
9	<b>7580</b>	LED4RL-58L927	2700K	580	4"	90	60	50,000/5	W
9	<b>7177</b>	LED4RL-55L930	3000K	550	4"	90	60	35,000/3	D
10	<b>7519</b>	LED4RL-70L930-JA8	3000K	700	5/6"	90	65	35,000/3	W
9	<b>7198</b>	LED4RL-56L827CP (2pack)	2700K	650	4"	80	60	50,000/5	W
13	<b>7199</b>	LED6RL-88L827CP (2pack)	2700K	980	5/6"	80	90	50,000/5	W

## ACCESSORIES (Ordered Separately)

P10029	ADP-RLGU24-N	GU24 Socket Adaptor for LED Recessed Retrofit Kit
P10057	RT-4RL-BK	Recessed Trim: 4-in recessed light (Black)
P10060	RT-6RL-BK	Recessed Trim: 5/6-in recessed light (Black)
P10058	RT-4RL-CH	Recessed Trim: 4-in recessed light (Chrome)
P10061	RT-6RL-CH	Recessed Trim: 5/6-in recessed light (Chrome)
P10082	RT-4RL-CH-WH	Recessed Trim: 4-in recessed light (Chrome/White)
P10083	RT-6RL-CH-WH	Recessed Trim: 5/6-in recessed light (Chrome/White)
P10059	RT-4RL-BZ	Recessed Trim: 4-in recessed light (Bronze)
P10062	RT-6RL-BZ	Recessed Trim: 5/6-in recessed light (Bronze)
P10084	RTS-4RL-WH	Recessed Trim: 4-in recessed light (White/Square)
P10085	RTS-6RL-WH	Recessed Trim: 5/6-in recessed light (White/Square)



TRIMS (Black, Chrome, Bronze, White and Square)


## Emergency Driver




7337 BAEM25-170BC/347-C  
(25W Micro Inverter 120-347  
with 12" Conduit)

## DIMENSIONS


**4-inch**  
0.60-lbs

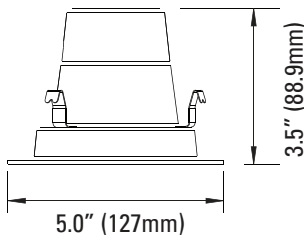

**6-inch**  
0.90-lbs

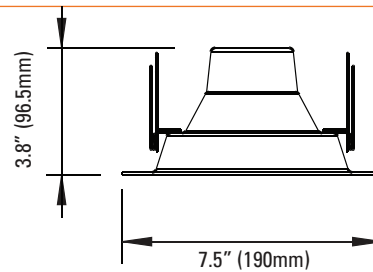


## PHOTOMETRICS CHART

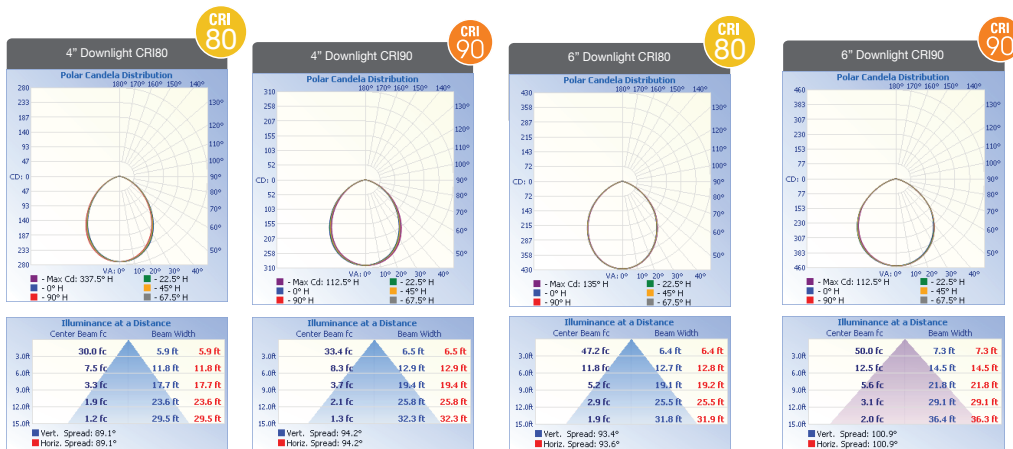


## PACKAGE

**Case Qty**  
5 pcs  
(item #7199)



10 pcs  
(6" RL)



20 pcs  
(4" RL)

