

SECW/SECWRT SECURITY WALL LIGHTS

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

DESCRIPTION

naturaLED® security lighting provides cast aluminum back plate, our security lights are suitable for wet locations with the IP ratings of 65. Easy installation, gasketing between back plate and front prevents entry of water. Polyester powder-coated finish, rust and corrosion proof, maintenance free throughout the years of usage.

Photocell Included



Rated Life 50,000 Hours
Warranty 5 Years

APPLICATIONS

Security, Pathway, Perimeter, Area, Wall Lighting

FEATURES

- IP65 Rated
- ETL Rated
- ColorTemp: 4000K
- Voltage: 120-277V
- Power Factor: >0.9
- Surge Protection: 1KV
- CRI: >80
- Operating temperature: - 22°F - 131°F
- Excellent thermal design
- Uniform and consistent color
- Recommended 15-30 foot height performance
- Material: die case aluminum with plastic housing
- Color: Black
- 5 Year Warranty

SAMPLE NUMBER		LED-FXSECW20/40K/MV			
STYLE	FAMILY	SERIES	WATTAGE	CRI/COLOR TEMP	VOLTAGE
LED LED Lighting	FX Fixture	SECW Security Wall Light	20 20 Watt	40K CRI 80 4000K	MV Multiple Voltage



SECURITY WALL LIGHT


WALL & SECURITY LUMINAIRES

ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Color	IP65 Rated
20	7773	LED-FXSECW20/40K/MV	4000K	1,622	100	Black	•


DIMENSIONS

20W (SECW)
1.30-lbs

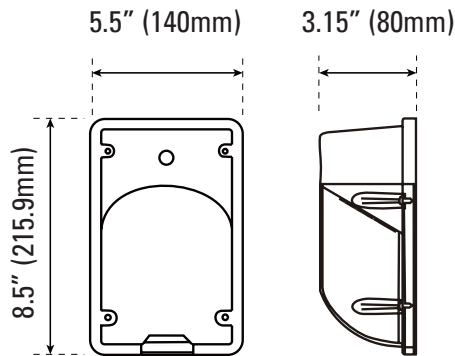

PHOTOMETRICS CHART

20 Watt

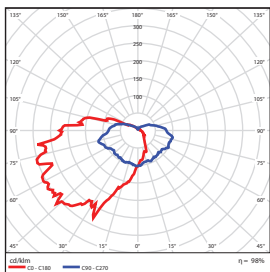

Center Beam Ft.	Beam Width
2.5R	23.7 fc 4.8 ft 10.4 ft
5.0R	5.92 fc 9.7 ft 20.8 ft
7.5R	2.63 fc 14.5 ft 31.1 ft
10.0R	1.48 fc 19.3 ft 41.5 ft
12.5R	0.95 fc 24.2 ft 51.9 ft
15.0R	0.66 fc 29.0 ft 62.3 ft

Vert. Spread: 88.1°
Horiz. Spread: 128.5°

PACKAGE

Case Qty 10 pcs

