

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

SWL STAIRWELL LIGHT

DESCRIPTION

The 4-foot naturaLED® SWL Stairwell LED delivers versatile, powerful illumination, producing up to 6,500 lumens with convenient selectable wattages and CCT3 technology. Perfect for staircases and corridors, it allows you to customize your lighting output while offering a built-in ready microwave sensor for energy-saving motion detection. Designed for long-lasting reliability, this sleek fixture is confidently backed by a 5-year warranty.



Sensor
Built-in



Rated Life Hours 50,000
Warranty 5 Years




APPLICATIONS

Stairwell, Commercial Office, Parking Structures, Healthcare Facilities

FEATURES

- DLC Premium
- ETL/cETL Listed
- Wattage & Color Selectable
- Microwave Sensor (Built-in)
- Wattage: 30-50W
- Color Temp: Selectable CCT3 (35/40/50K)
- Voltage: 120-277V
- Surge Protection: 2KV
- Dimmable: 0-10V
- CRI: >80
- Operating Temperature: -4°F to 113°F
- Beam Angle: 120°
- Lens: Polycarbonate Diffused Lens
- Material: Sheet Metal (Steel)
- Color: White (Epoxy Resin Coating)
- Optional Accessories for Purchase: Remote Programmer, Emergency Driver
- Warranty: 5-Year Limited Warranty

ACCESSORIES

-  Emergency Drivers
-  Microwave Sensor Programmer
-  Ultrasonic Sensor- Dimming

ACCESSORIES

Microwave Sensor Built-In



SAMPLE NUMBER		SWL50S/48FR/8C3-SEN		
SERIES	WATTAGE	LENGTH/LENS	CRI/COLOR TEMP	ACCESSORIES
SWL Stairwell	50S 30/40/50 Selectable Wattage	48FR 48-inch, Frosted	8C3 CRI 80 3CCT (3500/4000/5000K)	SEN Built-in Microwave Sensor



STAIRWELL LIGHT (SWL)

WALL & AREA LUMINAIRES

*P= Premium DLC / *S = Standard DLC

ORDERING

Ordering Code	Description	Watts (W)	Lumens (Lm)	CCT (K)	Length	Microwave Sensor	DLC (S/P)
9841	SWL50S/48FR/8C3-SEN	30	3,900	3CCT	4-ft	Built-in	S
		40	4,200	(35/40/50K)			
		50	6,500				

BUILT-IN




P10590 SEN-HD027VCR Built-in

Microwave Motion Sensor 0-10V, Bi-Level
*request P10323 to change default settings

Default Setting

- Detection Range: 100%
- Hold Time: 5 min
- Light Control: Disable
- Stand-by light level: 30%
- Stand-by time: Infinity

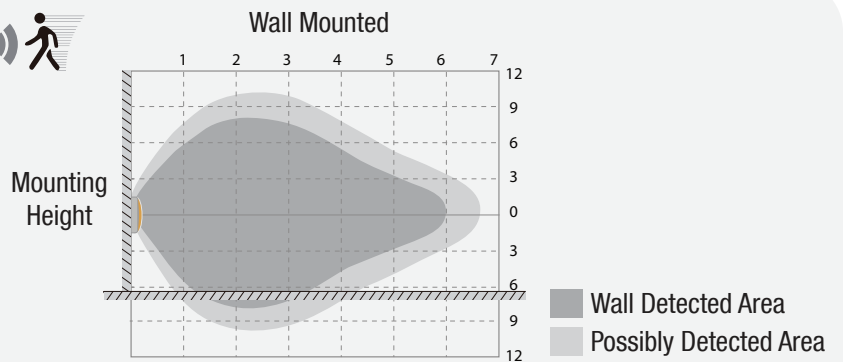

Highest Mounting Height is 6m (~20ft). This figure indicates the maximum distance at the highest mounting height with 100% sensitivity.

ACCESSORIES



P10323 SEN-HD06R
Remote Programmer for P10590




7347 BAEM4-55BC/347-A
4W Emergency Driver 120-277V



P106269 SEN-MW-PSC-BL-U-FM-DC0
Ultrasonic Sensor - Dimming

PHOTOMETRICS

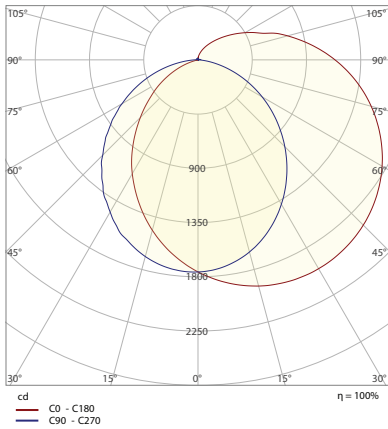


	Illuminance at a Distance	
	Center Beam fc	Beam Width
1.3ft	1,041 fc	5.4 ft 3.5 ft
2.7ft	241 fc	11.3 ft 7.2 ft
4.0ft	110 fc	16.7 ft 10.7 ft
5.3ft	62.6 fc	22.1 ft 14.2 ft
6.7ft	39.2 fc	28.0 ft 18.0 ft
8.0ft	27.5 fc	33.4 ft 21.5 ft

■ Vert. Spread: 128.8°
■ Horiz. Spread: 106.6°


DIMENSIONS

4-FT

4.8in (122mm)



5.43in
(138mm)

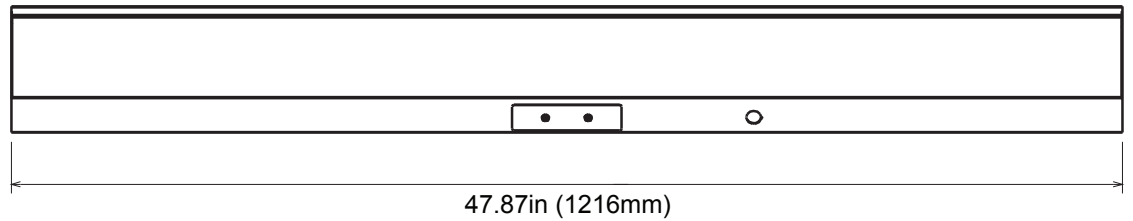

PACKAGE

Master Carton (pc)	Dimensions (in)	Weight (lb)
Single	48.5"x5.08"x5.98"	6.7
2	49.2"x5.9"x5.9"	15.6

