

PROJECT:

SCHEDULE:

DATE:

PREPARE BY:

NOTES:

TWX Compact Traditional Wall Pack

DESCRIPTION

The naturaLED® TWX compact traditional wallpack features a rugged cast-aluminum housing with an advanced thermal design for durability and efficient heat dissipation. As a DLC Premium qualified fixture, its sleek and compact design enhances the aesthetics of wall-mounted luminaires, making it an excellent replacement for traditional wallpacks or perimeter lighting. Designed for outdoor applications such as carpools, loading zones, driveways, parking lots, and pathways, it is intended for wall mounting at a height of at least four feet for optimal light distribution. Now available with Wattage Selectable and Color Temperature Selectable options, the TWX wallpack offers enhanced flexibility to meet various lighting needs.

APPLICATIONS

Security, Pathway, Perimeter, Entryway, Area Lighting, and Building Facades

FEATURES

- DLC Premium
- IP65 Rated
- ETL/cETL Listed
- IK Rating: IK10
- Wattage & Color Selectable
- Wattage: 25-60W, 60-100W
- Color Temp: CCT3 (30/40/50K)
- Voltage: 120-277V
- Surge Protection: 4KV
- Dimmable: 0-10V
- CRI: >80
- Operating Temperature: -40°F to 122°F
- Built-In Photocell Sensor (Easy On/Off Switch)
- Lens: Borosilicate Glass Lens
- Material: Die Cast Aluminum
- Color: Bronze / Black / White
- Optional Accessories for Purchase: Microwave Sensor, Emergency Driver, Remote Control
- Warranty: 5-Year Limited Warranty



Rated Life Hours 50,000
Warranty 5 Years

ACCESSORIES

	Microwave Sensor
	Emergency Backup Driver
	Remote Control

SAMPLE NUMBER FXTWX100SW/8CCT3/BZ-PHO

SERIES	WATTAGE	CRI/COLOR TEMP	COLOR	ACCESSORY
FXTWX Compact Traditional Wall Pack	100SW 100 Selectable Wattage	8CCT3 CRI 80 3CCT (3000/4000/5000K)	BZ Bronze	PHO Photocell Included



COMPACT TRADITIONAL WALL PACK

WALL & AREA LUMINAIRES

ORDERING

*P= Premium DLC / *S = Standard DLC

Ordering Code	Description	Watts (W)	Lumens (Lm)	CCT (K)	Equiv. Wattage (W)	Color	IP65 Rated	DLC (S/P)
7529	FXTWX60SW/8CCT3/BZ-PHO	25	3,729	3CCT	175-400	Bronze	•	P
		40	5,000	(30/40/50K)				
		60	7,538					
7530	FXTWX100SW/8CCT3/BZ-PHO	60	8,624	3CCT	400-750	Bronze	•	P
		80	10,000	(30/40/50K)				
		100	12,286					
9672	FXTWX60SW/8CCT3/BK-PHO	25	3,729	3CCT	175-400	Black	•	P
		40	5,000	(30/40/50K)				
		60	7,538					
9673	FXTWX100SW/8CCT3/BK-PHO	60	8,624	3CCT	400-750	Black	•	P
		80	10,000	(30/40/50K)				
		100	12,286					
9674	FXTWX60SW/8CCT3/WH-PHO	25	3,729	3CCT	175-400	White	•	P
		40	5,000	(30/40/50K)				
		60	7,538					
9675	FXTWX100SW/8CCT3/WH-PHO	60	8,624	3CCT	400-750	White	•	P
		80	10,000	(30/40/50K)				
		100	12,286					

ACCESSORIES



Microwave Sensor

P10540 SEN-ANT-11WH
(Remote Programmable Microwave Motion Sensor 0-10V Bi-Level Internal 12V Low Voltage)



Remote Control

P10316 SEN-BRI-RC100
(Remote Programmer for P10540)



Emergency Driver

7336 BAEM4-60BC/MV-A
(4W CEC Compliant LED Emergency Driver for 60-Watt #7529,9672,9674)


DIMENSIONS

60SW

9.26-lbs


100SW

9.48-lbs

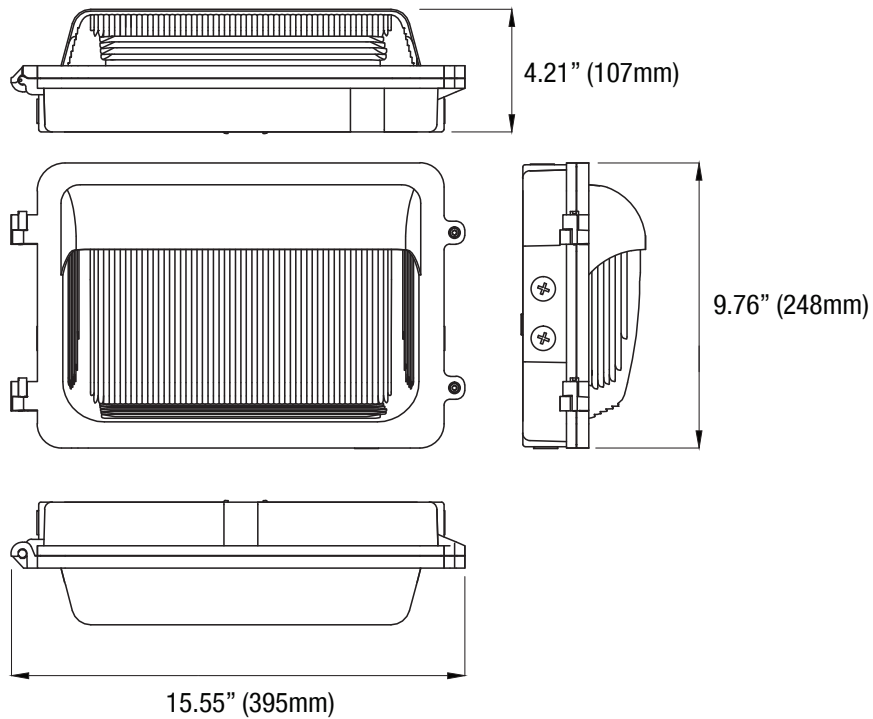

PACKAGE

	Master Carton (pc)	Dimensions (in)	Weight (lb)
60W	2	18.30"x18.30"x12.20"	23.26
100W	2	18.30"x18.30"x12.20"	23.26




COMPACT TRADITIONAL WALL PACK



WALL & AREA LUMINAIRES

PHOTOMETRICS


60 S/Wattage

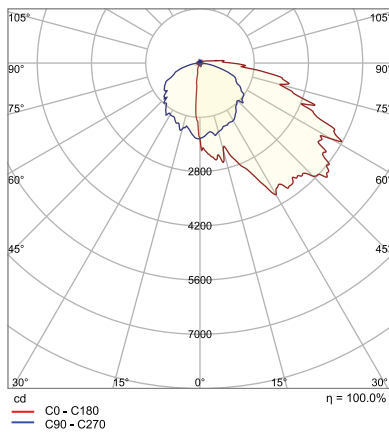

BUG rating B1 U3 G3

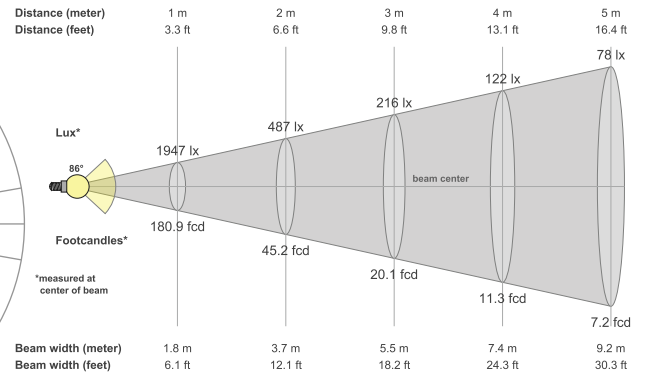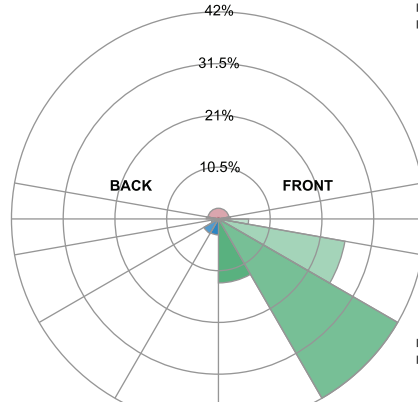

100 S/Wattage

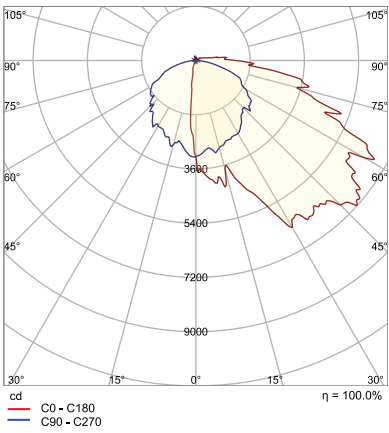

BUG rating B1 U3 G5

