

USL Utility Strip Light

DESCRIPTION

naturaLED® Utility Strip Light provides the perfect solution for your lighting needs. The LED utility strip light maximizes energy savings and is designed for multiple applications including new construction. The fixture offers in 4ft, or 8ft long and can be installed end to end. The LED Utility Strip Light can be used for warehouse, parking garages, stairwells, offices, hallways and many other applications in industrial, commercial and residential. Types of installation include ceiling, wall, chain or cable mounting. Our Utility Strip Light features an acrylic opaque lens with an aluminum body.

APPLICATIONS

Warehouse, Pathway Lighting, Parking Garage, Stairwells, Hallways, Retail Lighting

FEATURES

- Damp Location
- UL Listed
- CCT: 5000K
- Voltage: 120-277V
- Power Factor: >0.9
- Surge Protection: 2KV
- Beam Angle: 110°
- Dimmable: 1-10V
- CRI: >80
- Operating temperature: -22°F - 113°F
- Mounting brackets/clips for ceiling, wall, cable, and chain
- Easy installation with multiple mounting options
- Material: Aluminum and Opaque Lens
- 5Year Warranty

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____



Rated Life 50,000 Hours
Warranty 5 Years

SAMPLE NUMBER LED-FXUSL40/48FR/50K/MV

STYLE	FAMILY	SERIES	WATTAGE	LENGTH	COLOR TEMP	VOLTAGE
LED	FX	USL	40	48FR	50K	MV
LED Lighting	Fixture	Utility Strip Light	40 Watt	48 inch Frosted Lens	5000K	Multiple Voltage




ORDERING


Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Size	Dim	Equiv. Wattage (W)	Damp Location
40	9201	LED-FXUSL40/48FR/50K/MV	5000K	5,286	3.26" x 48"	1-10V	3 x32WT8	•
61	9203	LED-FXUSL64/96FR/50K/MV	5000K	7,943	3.26" x 96"	1-10V	4 x32WT8	•

DIMENSIONS

4ft
3.66-lbs

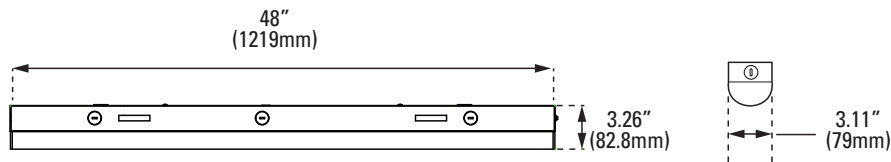


8ft
6.92-lbs

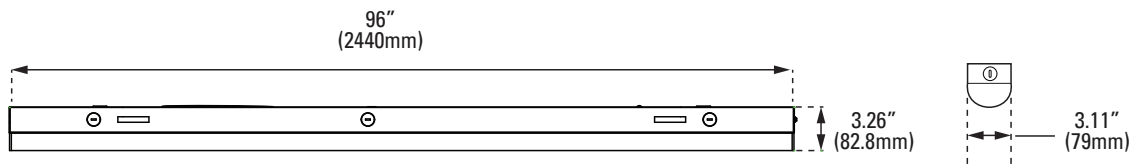


PHOTOMETRICS CHART

PACKAGE

40 Watt - 4ft



61 Watt - 8ft



Distance (ft)	Center Beam fc	Beam Width
5.0 ft	53.7 fc	26.2 ft
10.0 ft	13.4 fc	52.3 ft
15.0 ft	5.97 fc	78.5 ft
20.0 ft	3.36 fc	104.7 ft
25.0 ft	2.15 fc	130.9 ft
30.0 ft	1.49 fc	157.0 ft

Vert. Spread: 138.2°
Horiz. Spread: 108.6°

Distance (ft)	Center Beam fc	Beam Width
5.0 ft	82.6 fc	13.4 ft
10.0 ft	20.6 fc	26.9 ft
15.0 ft	9.18 fc	40.3 ft
20.0 ft	5.16 fc	53.7 ft
25.0 ft	3.30 fc	67.2 ft
30.0 ft	2.29 fc	80.6 ft

Vert. Spread: 106.7°
Horiz. Spread: 145.5°

Case Qty 1 pc

