

PROJECT: _____

SCHEDULE: _____ DATE: _____


PREPARE BY: _____

NOTES: _____

VTJ Vapor Tight Jelly Jar

DESCRIPTION

naturaLED® Vapor Tight Jelly Jar (VTJ) is designed to replace incandescent and CFL fixtures, providing long-lasting LED illumination for doorways, scaffolding, construction sites, and other demanding applications. IP65 rated for protection against dust and pressurized water. Constructed with a cast aluminum housing and glass lens. Adjustable mounting angle supports both ceiling and wall installations. Delivers up to 65% energy savings with zero maintenance over 50,000+ hour average life. Finish: Gray (RAL7004).

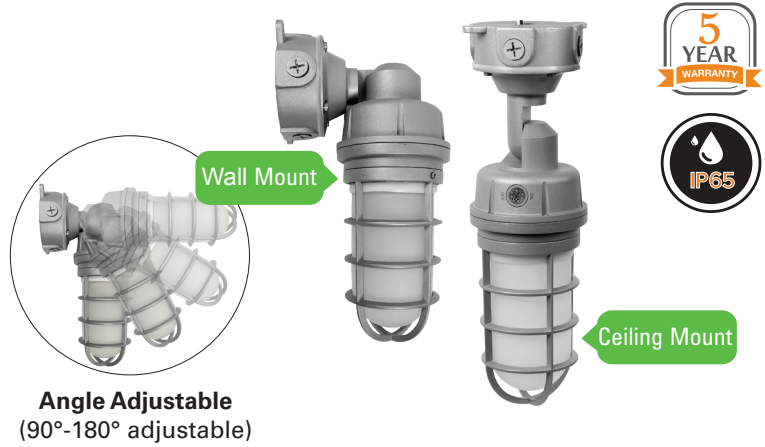

Angle Adjustable
(90°-180° adjustable)

APPLICATIONS

Warehouse , Security, Pathway, Doorway, Scaffolding, Fire Hydrants, Construction Sites Lighting



Rated Life Hours 50,000
Warranty 5 Years

FEATURES

- IP65 Rated
- ETL/cETL Listed
- Wattage & Color Selectable
- Wall / Ceiling Mount
- Wattage: 10~20W
- Color Temp: CCT3 (30/40/50K)
- Built-in Photocell
- Voltage: 120-277V
- Surge Protection: 4KV
- CRI: >80
- Operating temperature: -40°F - 122°F
- Frosted glass diffuser provides you glare-free light
- High efficacy with 80-95 lumen per watt
- High- temperature silicone gasket protects against moisture and dust
- Four 1/2" conduit entries for easy wiring
- Adjustable Angle for wall or ceiling mount (90°~180°)
- Material: Die cast aluminum / glass
- Color: Gray (RAL 7004)
- 5 Year Warranty

ACCESSORIES



SAMPLE NUMBER VTJ/20S/8C3/GY/MV-PHO

SERIES	WATTAGE	CRI/COLOR TEMP	COLOR	VOLTAGE	BUILT-IN
VTJ	20S	8C3	GY	MV	PHO
Vapor Tight Jelly Jar	20 Selectable Wattage	CRI80 CCT3(30/40/50K)	Gray	Mutiple Voltage	Photocell Included



ORDERING

Ordering Code	Description	Watts (W)	Lumens (Lm)	CCT (K)	Equiv. Wattage (W)	Mount	Beam Angle	IP65 Rated
9544	VTJ/20S/8C3/GY/MV-PHO	10	800	3CCT	<150W	Wall /Ceiling	210°	•
		15	1,200	(30/40/50K)				
		20	1,600					


ACCESSORIES




Glass Lens
P10657 LENS-VTJ-RED
(Red Glass Lens)

DIMENSIONS

10/15/20W
3.75-lbs

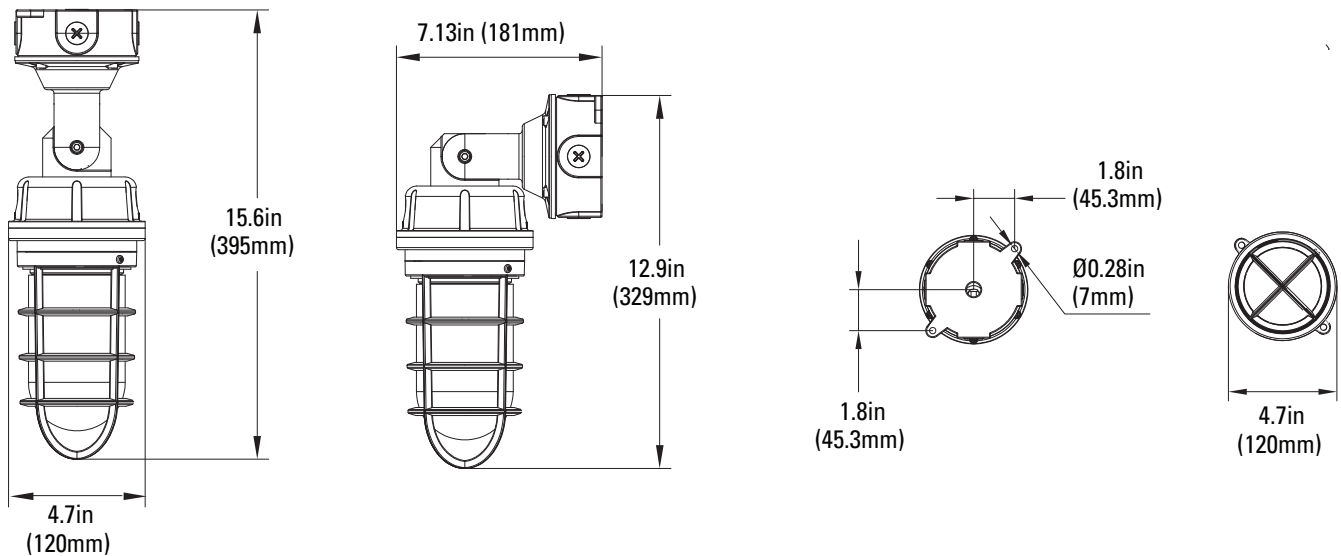


PHOTOMETRICS

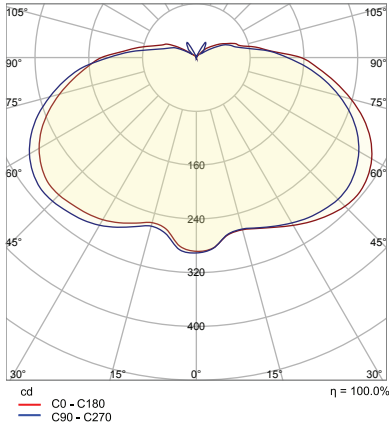

Illuminance at a Distance			
	Center Beam fc	Beam Width	
1.7ft	99.7 fc	88.4 ft	32.8 ft
3.3ft	26.5 fc	171.5 ft	63.6 ft
5.0ft	11.5 fc	259.9 ft	96.3 ft
6.7ft	6.42 fc	348.3 ft	129.1 ft
8.3ft	4.18 fc	431.5 ft	159.9 ft
10.0ft	2.88 fc	519.8 ft	192.6 ft

■ Vert. Spread: 175.6°
■ Horiz. Spread: 168.1°

BUG rating B1 U3 G1

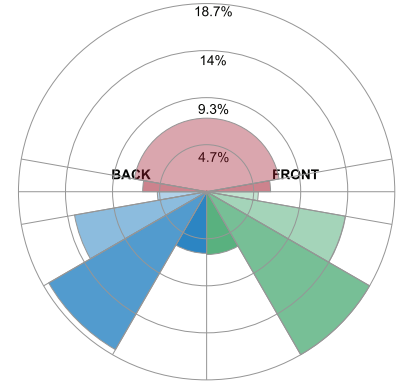

PACKAGE

	Master Carton (pc)	Dimensions (in)	Weight (lb)
20W	2	16" x 6.10" x 11.80"	7.72

