

WP WALL PACK 5700K

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

DESCRIPTION

naturaLED® high-powered LED array wall pack with well-engineered, high-quality die-cast aluminum, delivering bright, crisp light. The excellent thermal design ensures our wall pack performance over rated life. Installation is made simple and easy with an adjustable angle yoke mounq. Ideal for landscape, wall/surface, low-level pathway, apartment buildings, schools and multi-use facilities.



**Rated Life 35,000 Hours
Warranty 3 Years**

APPLICATIONS

Security, Pathway, Perimeter, Entryway, Area Lighting, and building facades

FEATURES

- IP65 Rated
- UL Listed
- Color Temp: 5700K
- Voltage: 120-277V
- Power Factor: >0.99
- Material: Die Cast Aluminum
- Beam Angle: H: 65° /V: 60°
- CRI: 70
- Operating temperature: - 40°F - 122°F
- Low Maintenance
- High heat conduction and high reliability
- Excellent thermal design
- Flexible angle yoke mount
- Equivalent up to 150W HID system
- Finish: Corrosion resistant powder coating
- Color: Black
- 3 Year Warranty

ACCESSORIES



Photocell Sensor

SAMPLE NUMBER		LED-FXWP35/57K		
STYLE	FAMILY	SERIES	WATTAGE	COLOR TEMP
LED led lighting	FX fixture	WP wallpack	35 35 watt	57K 5700K




ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Voltage	Rated Life Hours	IP65 Rated
35	7012	LED-FXWP35/57K	5700K	2,788	150	120-277	35,000	•
45	7015	LED-FXWP45/57K	5700K	3,300	175	120-277	35,000	•

DIMENSIONS

35W / 45W
6.95-lbs

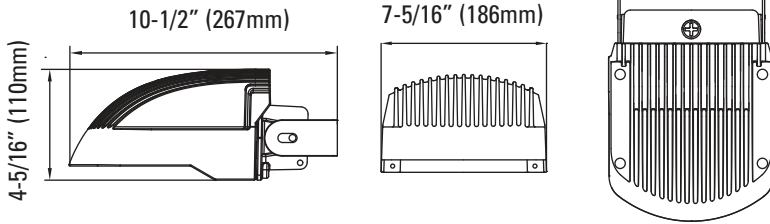


ACCESSORIES (Ordered Separately)

Photocell



P10036 SEN-PHO-BT-MT/MV
(Button Photocell 120-277V)



MOUNTS & INSTALLATION

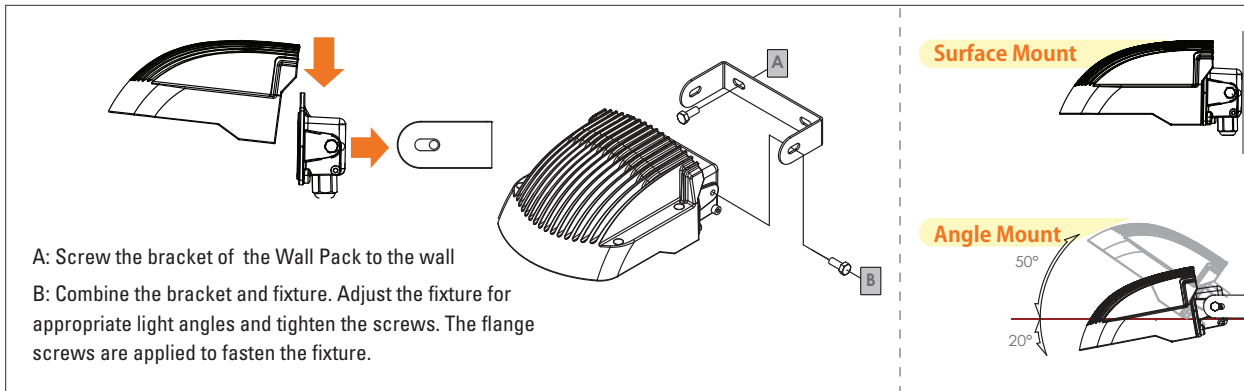


PHOTOMETRICS CHART

PACKAGE

35 Watt

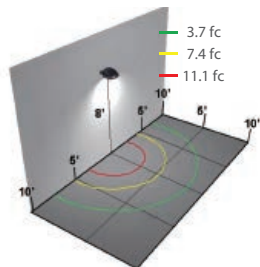

Case Qty 2 pcs

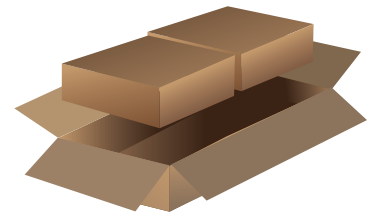

45 Watt

