


Version	2.1	Date	1/26/25
Prepared By	JC		

PRODUCT SPECIFICATION	
Category	4" Pendant Cylinder Light
Item Number	7047
Stock Code	FX4PCL30SW/50CL/9CCT5/BK/MV
Mounting	Pendant
Housing Color	Black

PICTURE

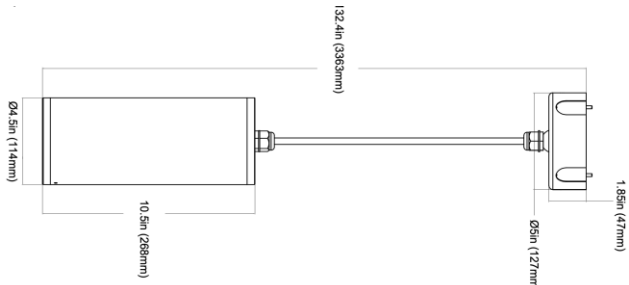


ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	18 / 24 / 30	Replacement Wattage (W)	100
Tested Wattage (W)	18 / 24 / 30		
Input Voltage (V)	120-277V	Surge Protect Level	2.5KV
Voltage Frequency (Hz)	50/60	Dimmable	0-10V
Input Current (A)	Max 0.3	AUX (12V) Line	No
Power Factor	>0.9		
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	1,260 1,680 2,100	CCT (K)	CCT5 (27/30/35/40/50K)
Efficacy (lm/w)	-	Beam Angle (°)	50°
CRI	>90		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-4°F ~ 104°
Storage Temperature (°F)	-4°F ~ 104°
IP Rating	Wet Location
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
P10063	MT-PCL-ROD-BK-24IN	Pendant Rod 24" (2 x 12")
P10619	MT-PCL/CM/BK	Surface Mount Plate

PRODUCT DIMENSIONS		
Width- in / (mm)	4.5" / 114	
Height- in / (mm)	132.4" / 3363	
Depth- in / (mm)	4.5" / 114	
Pendant Pole- in / (mm)	12"/24"	
Weight (lbs)	2.65	
Mounting Height (ft)	-	
Cable Length (ft)	-	

CERTIFICATIONS			
UL/ETL	ETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	
DLC		RoHs	

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS