

|             |     |      |          |
|-------------|-----|------|----------|
| Version     | 2.1 | Date | 12/20/24 |
| Prepared By | JC  |      |          |

| PRODUCT SPECIFICATION |                      |
|-----------------------|----------------------|
| Category              | Flush Mount - Modern |
| Item Number           | 7430                 |
| Stock Code            | LED12FMM-138L830-NI  |
| Mounting              | 12" Surface          |
| Housing Color         | White + Nickel       |




| ELECTRICAL CHARACTERISTICS |      |                         |     |
|----------------------------|------|-------------------------|-----|
| Rated Wattage (W)          | 18   | Replacement Wattage (W) | 120 |
| Tested Wattage (W)         | 18   |                         |     |
| Input Voltage (V)          | 120V | Surge Protect Level     | -   |
| Voltage Frequency (Hz)     | 60   | Dimmable                | Yes |
| Input Current (A)          | 0.16 | AUX (12V) Line          | -   |
| Power Factor               | >0.9 |                         |     |
| THD                        | <20% |                         |     |

| PHOTOMETRIC CHARACTERISTICS |       |                |       |
|-----------------------------|-------|----------------|-------|
| Lumen (lm)                  | 1,380 | CCT (K)        | 3000K |
| Efficacy (lm/w)             | -     | Beam Angle (°) | Flood |
| CRI                         | >80   |                |       |

| GENERAL CHARACTERISTICS    |               |
|----------------------------|---------------|
| Operating Temperature (°F) | -4°F ~ 104°   |
| Storage Temperature (°F)   | -4°F ~ 140°   |
| IP Rating                  | Damp Location |
| IK Rating                  | -             |
| Rated Life (Hrs)           | 50,000        |
| Warranty (Yrs)             | 5             |

| ACCESSORIES |                    |  |
|-------------|--------------------|--|
| Item #      | Stock Code         | Description                                  |
| 7337        | BAEM25-170BC/347-C | 25W Micro Inverter 120-347V with 12" Conduit |
|             |                    |  |
|             |                    |  |
|             |                    |  |

| PRODUCT DIMENSIONS   |        |     |
|----------------------|--------|-----|
| Width- in / (mm)     | 12.00" | 305 |
| Height- in / (mm)    | 3.35"  | 85  |
| Depth- in / (mm)     | -      | -   |
| EPA (ft²)            | -      | -   |
| Weight (lbs)         | 1.96   |     |
| Mounting Height (ft) | 8~15   |     |
| Cable Length (ft)    | -      |     |

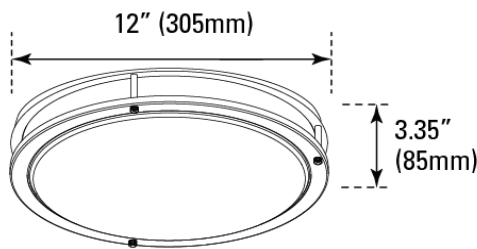

| CERTIFICATIONS     |     |      |   |
|--------------------|-----|------|---|
| UL/ETL             | ETL | CEC  |   |
| NSF/ETL Sanitation |     | JA8  |   |
| Energy Star        |     | FCC  | ✓ |
| DLC                |     | RoHs | ✓ |

| DOCUMENTS |   |             |   |
|-----------|---|-------------|---|
| LM79      | ✓ | IES File    | ✓ |
| LM80      | ✓ | Dimmer List |   |
|           |   |             |   |

| COMMENTS |
|----------|
|          |