naturaled®

Version	2.1	Date	12/20/24
Prepared By	JC		

PRODUCT SPECIFICATION

Category	Bollard
Item Number	7667
Stock Code	FX5.5BLD18SW/42RLO/8CCT3/BZ
Mounting	Ground Mounting
Housing Color	Bronze (RAL#8019)

PICTURE

ELECTRICAL CHARACTERISTICS

Rated Wattage (W)	10/15/18	Replacement Wattage (W)	100
Tested Wattage (W)	10/15/18		
Input Voltage (V)	120-277V		
Voltage Frequency (Hz)	50/60	Surge Protect Level	10KV
Input Current (A)	0.16	Dimmable	0-10V
Power Factor	>0.9	AUX (12V) Line	-
THD	<20%		

PHOTOMETRIC CHARACTERISTICS

Lumen (lm)	600 900 1,080	CCT (K)	3CCT(30/40/50K)
Efficacy (lm/w)	60	Beam Angle (°)	360°
CRI	>80		

GENERAL CHARACTERISTICS

Operating Temperature (°F)	-40°F ~ 122°F
Storage Temperature (°F)	-40°F ~ 140°F
IP Rating	IP65
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES

Item #	Stock Code	Description

PRODUCT DIMENSIONS

Diameter of head - in / (mm)	5.50"	140.5
Diameter of body - in / (mm)	5.50"	140.5
Length- in / (mm)	41.6"	1056
EPA (ft²)	-	
Weight (lbs)	-	
Mounting Height (ft)	-	
Cable Length (ft)	-	

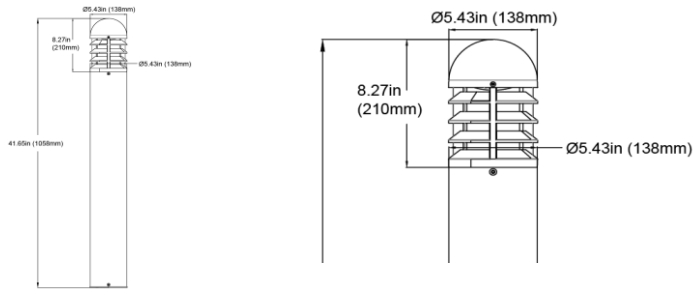

CERTIFICATIONS

UL/ETL	ETL/cETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC		RoHs	✓

DOCUMENTS

LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS