

Version	1.0	Date	8/29/25
Prepared By	JC		

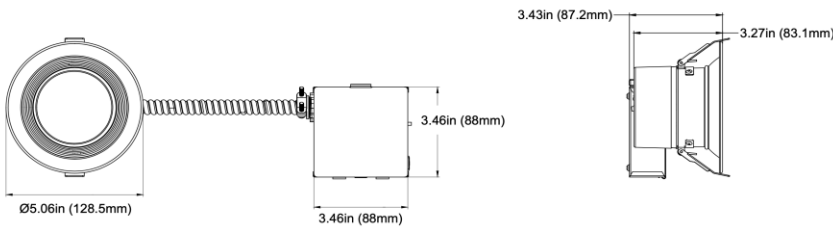
PRODUCT SPECIFICATION			
Category	Commercial Recessed Light	PICTURE 	
Item Number	9471		
Stock Code	LED4CRL12SW-96L9CCT3/MV		
Mounting	4" Recessed		
Housing Color	White		

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	7/9/12	Replacement Wattage (W)	60-150
Tested Wattage (W)	12		
Input Voltage (V)	120-277V	Surge Protect Level	2KV
Voltage Frequency (Hz)	60		
Input Current (A)	0.2 (@120V)	Dimmable	0-10V
Power Factor	>0.9	AUX (12V) Line	No
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	574	CCT (K)	3CCT (30/40/50K)
	738		
	984		
Efficacy (lm/w)	82lm/w	Beam Angle (°)	110°
CRI	>90		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	5°F ~ 113°
Storage Temperature (°F)	-4°F ~ 104°
IP Rating	Wet Location
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
7337	BAEM25-170BC/347-C	25W Micro Inverter 120-347V with 12" Conduit
7342	BAEM40-170BC/347-C	40W Micro Inverter 120-347V

PRODUCT DIMENSIONS			
Width- in / (mm)	5.06"	128.5	
Height- in / (mm)	3.43"	87.2	
Depth- in / (mm)	-	-	
EPA (ft²)	-	-	
Weight (lbs)	-	-	
Mounting Height (ft)	-	-	
Cable Length (ft)	-	-	

CERTIFICATIONS			
UL/ETL	ETL/cETL	CEC	✓
NSF/ETL Sanitation		JA8	✓
Energy Star	✓	FCC	✓
DLC		RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS