naturaled®

Version	2.0	Date	9/26/23
Prepared By	JC		

PRODUCT SPECIFICATION

Category	Slim Canopy
Item Number	9546
Stock Code	FX13SCM100SW/8CCT3/BK
Mounting	Ceiling
Housing Color	Black

PICTURE

ELECTRICAL CHARACTERISTICS

Rated Wattage (W)	60 / 80 / 100	Replacement Wattage (W)	>400
Tested Wattage (W)	-		
Input Voltage (V)	120-277V		
Voltage Frequency (Hz)	50/60	Surge Protect Level	4KV
Input Current (A)	0.91	Dimmable	0-10V
Power Factor	>0.9	AUX (12V) Line	Yes
THD	<20%		

PHOTOMETRIC CHARACTERISTICS

Lumen (lm)	7,506 10,008 12,533	CCT (K)	3CCT (30/40/50K)
Efficacy (lm/w)	125 140 130	Beam Angle (°)	160°
CRI	>80		

GENERAL CHARACTERISTICS

Operating Temperature (°F)	-40°F ~ 122°F
Storage Temperature (°F)	-40°F ~ 176°F
IP Rating	IP65
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES

Item #	Stock Code	Description
7334	BAEM15-48BC/MV-A	15W LED Emergency Driver
P10575	WG-SCM13	Wire Guard for 13"
P10438	SEN-HB001VCR-1	Mircowave Sensor 0-10V Internal 12V
P10036	SEN-PHO-BT-MT/MV	Button Photocell
P10195	PLT-SCM/14X14/WH	14"x14" Beauty Plate used with Canopy Fixtures
P10196	PLT-SCM/24X24/WH	24"x24" Beauty Plate used with Canopy Fixtures

PRODUCT DIMENSIONS

Width- in / (mm)	13“	330
Height- in / (mm)	4.50"	117
Depth- in / (mm)	13“	330
EPA (ft²)	-	
Weight (lbs)	7.72	
Mounting Height (ft)	15~25	
Cable Length (ft)	-	

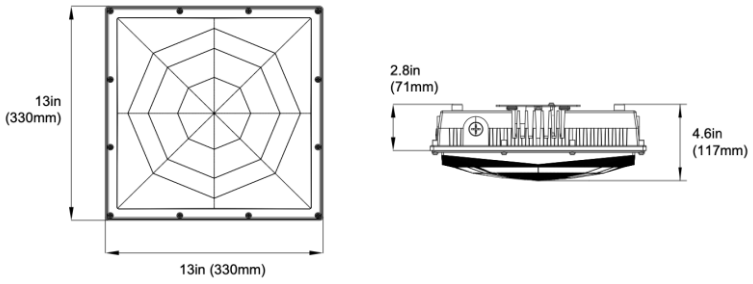

CERTIFICATIONS

UL/ETL	ETL/cETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	5.1 Premium	RoHs	✓

DOCUMENTS

LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS