

Version	1.0	Date	6/26/24
Prepared By	JC		

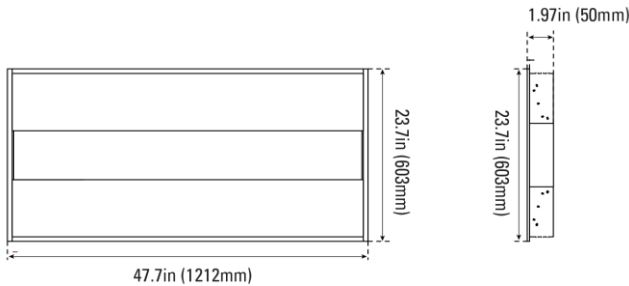
PRODUCT SPECIFICATION			
Category	Troffer		
Item Number	9596		
Stock Code	FXTF45SW/2X4/8CCT3/347		
Mounting	Ceiling		
Housing Color	White		
		PICTURE	

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	30 / 40 / 45	Replacement Wattage (W)	90-130
Tested Wattage (W)	45		
Input Voltage (V)	120-347V		
Voltage Frequency (Hz)	50/60	Surge Protect Level	2KV
Input Current (A)	0.43	Dimmable	0-10V
Power Factor	>0.9	AUX (12V) Line	-
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	4,050/5,240/5,850	CCT (K)	3500
Lumen (lm)	4,350/5,720/6,390		4000
Lumen (lm)	4,350/5,720/6,390		5000
Efficacy (lm/w)	130	Beam Angle (°)	115°
CRI	>80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-4°F ~ 104°
Storage Temperature (°F)	-4°F ~ 140°
IP Rating	Damp Location
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
K7336427	FXTFSW-BAEM-MT	Emergency Driver Kit
K438380	SEN-HB001VCR/BA12V	Motion Sensor Kit
P10418	MT-2X4BOX-3.0IN	3.0" Height 2x4 Surface Mount Kit
P10336	MT-2x4BOX-4.5in	4.5" Height 2x4 Surface Mount Kit
P10229	MT-2X4FMBOX	2x4 Flange Mount Kit

PRODUCT DIMENSIONS			
Width- in / (mm)	47.70"	1212	
Height- in / (mm)	23.70"	603	
Depth- in / (mm)	1.97"	50	
IK Rating	-		
Weight (lbs)	15		
Mounting Height (ft)	8~10		
Cable Length (ft)	-		

CERTIFICATIONS			
UL/ETL	ETL/cETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	5.1 Standard	RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS