

Version	2.0	Date	10/14/26
Prepared By	JC		

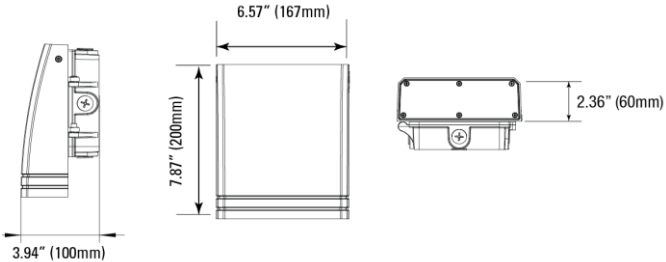
PRODUCT SPECIFICATION			
Category	Slim Wall Pack	PICTURE	
Item Number	9695		
Stock Code	FXSWP15/CCT3/BZ-PHO		
Mounting	Wall Mount		
Housing Color	Bronze		

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	15	Replacement Wattage (W)	100-250
Tested Wattage (W)	15		
Input Voltage (V)	120-277V		
Voltage Frequency (Hz)	50/60	Surge Protect Level	4KV
Input Current (A)	0.14	Dimmable	0-10V
Power Factor	>0.9	AUX (12V) Line	-
THD	<20%	IK Rating	IK09

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	2,025	CCT (K)	3CCT (30/40/50K)
Efficacy (lm/w)	135	Beam Angle (°)	Flood
CRI	>70		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-40°F ~ 122°F
Storage Temperature (°F)	-40°F ~ 140°F
IP Rating	IP65
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
K540380	SEN-ANT-11-WH/BA12V	Remote Programmable Microwave Bi-Level Motion Sensor Kit 0-10V
P10316	SEN-BRI-RC100	Remote Programmer for K540380

PRODUCT DIMENSIONS		
Width- in / (mm)	6.57" 167	
Height- in / (mm)	7.87" 200	
Depth- in / (mm)	3.94" 100	
EPA (ft²)	-	
Weight (lbs)	4.2	
Mounting Height (ft)	2~10ft	
Cable Length (ft)	-	

CERTIFICATIONS			
UL/ETL	ETL/cETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	6.0 Premium	RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	
ADA Compliant	✓		

COMMENTS