

Version	2.0	Date	9/17/26
Prepared By	JC		

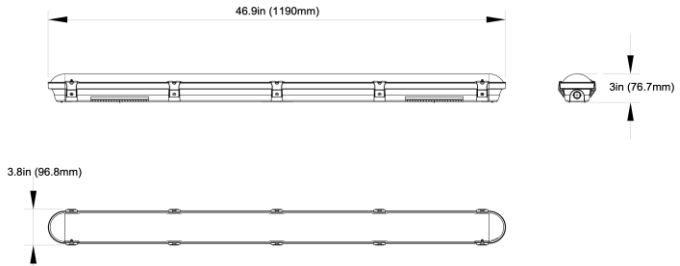
PRODUCT SPECIFICATION			
Category	Vapor Tight Slim	PICTURE 	
Item Number	9710AUX		
Stock Code	VTL4/50S/48FR/8C3-AUX		
Mounting	4-ft Ceiling Mount		
Housing Color	Gray + PC Lens		

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	30 / 40 / 50	Replacement Wattage (W)	2 x 32W T8
Tested Wattage (W)	-		
Input Voltage (V)	120-277V	Surge Protect Level	4KV
Voltage Frequency (Hz)	50/60		
Input Current (A)	0.45 (@120V)	Dimmable	0-10V
Power Factor	>0.9	AUX (12V) Line	Yes
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	4,350	CCT (K)	3CCT (35/40/50K)
	5,800		
Efficacy (lm/w)	145lm/w@3500K	Beam Angle (°)	120°
	160lm/w@4000K		
	150lm/w@5000K		
CRI	>80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-40°F ~ 122°
Storage Temperature (°F)	-40°F ~ 176°
IP Rating	IP65
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
7348	BAEM4-55BC/347-A-IP65	4W CEC-Compliant LED Emergency Driver 120-347V w/ IP65 Indicator
P10591	SEN-HD10VR-PH-1A-AUX	Sensor-Motion 0-10V external 12V Highbay PIR Indoor
P10323	SEN-HD06R	Remote Programmer for P10591
P10622	MT-CLIP/VTL-1	Optional Plastic Lens Clips (12pcs)

PRODUCT DIMENSIONS			
Width- in / (mm)	46.90"	1190	
Height- in / (mm)	3.80"	96.8	
Depth- in / (mm)	3.0"	76.7	
IK Rating	-		
Weight (lbs)	-		
Mounting Height (ft)	7~8		
Cable Length (ft)	-		

CERTIFICATIONS			
UL/ETL	ETL, cETLus	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	5.1 Premium	RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS