

Version	2.0	Date	7/24/25
Prepared By	JC		

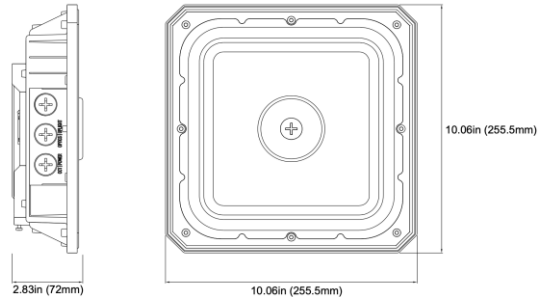
PRODUCT SPECIFICATION			
Category	Slim Canopy with Uplight	PICTURE	
Item Number	9742		
Stock Code	SCM10/100S/8C3/BK-Z10		
Mounting	Ceiling		
Housing Color	Black		

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	40/60/80/100	Replacement Wattage (W)	100-400
Tested Wattage (W)	-		
Input Voltage (V)	120-277V	Surge Protect Level	6KV
Voltage Frequency (Hz)	50/60		
Input Current (A)	0.91	Dimmable	0-10V
Power Factor	>0.9	AUX (12V) Line	Yes
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	3000K: 13,500 4000K: 15,500 5000K: 14,000	CCT (K)	CCT3 (30/40/50K)
Efficacy (lm/w)	3000K: 135 4000K: 155 5000K: 140	Beam Angle (°)	Parking Garage 150° Canopy 125°
CRI	>80	Uplight Wattage	10% of lumen

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-40°F ~ 122°F
Storage Temperature (°F)	-40°F ~ 176°F
IP Rating	IP65
IK Rating	
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
7343	BAEM8-56BC/347-SD-A	8W CEC-Compliant LED Emergency Driver 120-347V with Self-Test
P10574	WG-SCM10	Wire Guard for 10" SCM (not compatible with Z10 Sensor)
P10520	SEN-ANT-5-Z10-PC	Z10 Twist-Lock Photocell 12-24Vdc - White
P10521	SEN-ANT-5-Z10	Z10 Twist-Lock Microwave Motion and Photocell Sensor, 0-10V, 12-24Vdc -
P10522	SEN-ANT-6-Z10	Z10 Twist-Lock PIR Motion and Photocell Sensor, 0-10V, 12-24Vdc - White
P10316	SEN-BRI-RC100	Remote Programmer P10521, P10522

PRODUCT DIMENSIONS			
Width- in / (mm)	10.06"	255.5	
Height- in / (mm)	2.83"	72	
Depth- in / (mm)	10.06"	255.5	
EPA (ft²)	-		
Weight (lbs)	4.32		
Mounting Height (ft)	-		
Cable Length (ft)	6"		

CERTIFICATIONS			
UL/ETL	ETL/cETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	6.0 Premium	RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS