

Version	2.0	Date	6/17/25
Prepared By	JC		

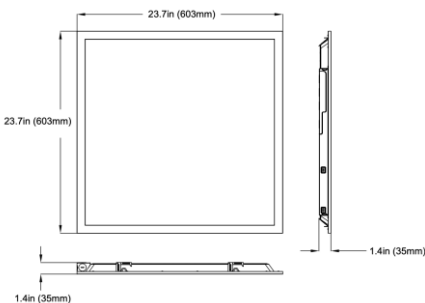
PRODUCT SPECIFICATION			
Category	Backlit Panel		
Item Number	9754		
Stock Code	FXPNL40SW/2x2/8CCT3		
Mounting	Recessed		
Housing Color	White		
		PICTURE	

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	20/30/40	Replacement Wattage (W)	90-100
Tested Wattage (W)	20/30/40		
Input Voltage (V)	120-277V		
Voltage Frequency (Hz)	50/60	Surge Protect Level	2.5KV
Input Current (A)	0.102	Dimmable	0-10V
Power Factor	>0.9	AUX (12V) Line	Yes
THD	-		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	2,200	CCT (K)	3CCT (35/40/50K)
	3,300		
	4,400		
Efficacy (lm/w)	110	Beam Angle (°)	115°
CRI	>80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-4°F ~ 104°
Storage Temperature (°F)	-40°F ~ 185°
IP Rating	Damp Location
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
7346	BAEM8-PNL-50BC/MV-A	8W Emergency Driver for 100-277V for Back-Lit Flat Panels

PRODUCT DIMENSIONS			
Width- in / (mm)	23.70"	603	
Height- in / (mm)	1.40"	35	
Depth- in / (mm)	23.70"	603	
IK Rating	-		
Weight (lbs)	-		
Mounting Height (ft)	8~20		
Cable Length (ft)	-		

CERTIFICATIONS			
UL/ETL	ETL/cETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	5.1 Standard	RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS