

|             |     |      |         |
|-------------|-----|------|---------|
| Version     | 2.0 | Date | 5/20/25 |
| Prepared By | JC  |      |         |

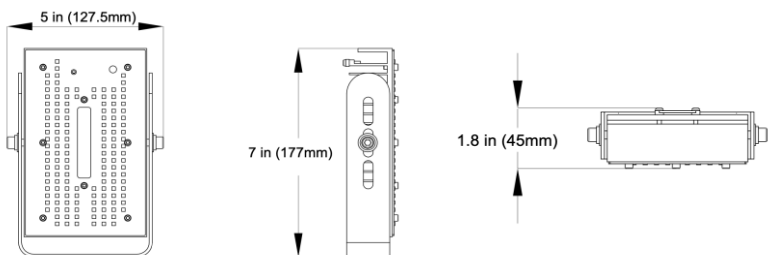
| PRODUCT SPECIFICATION |                  |                                                                                                        |  |
|-----------------------|------------------|--------------------------------------------------------------------------------------------------------|--|
| Category              | HID Retrofit Kit | <div>PICTURE</div>  |  |
| Item Number           | 9757             |                                                                                                        |  |
| Stock Code            | RKIT50S/HID/8C3  |                                                                                                        |  |
| Mounting              | Yoke / Screw     |                                                                                                        |  |
| Housing Color         | Black            |                                                                                                        |  |

| ELECTRICAL CHARACTERISTICS |              |                            |       |
|----------------------------|--------------|----------------------------|-------|
| Rated Wattage (W)          | 30/40/50     | Replacement<br>Wattage (W) | 250   |
| Tested Wattage (W)         | 30/40/50     |                            |       |
| Input Voltage (V)          | 120-277V     |                            |       |
| Voltage Frequency (Hz)     | 50/60        | Surge Protect Level        | 10KV  |
| Input Current (A)          | 0.45 (@120V) | Dimmable                   | 0-10V |
| Power Factor               | >0.9         | AUX (12V) Line             | Yes   |
| THD                        | <20%         |                            |       |

| PHOTOMETRIC CHARACTERISTICS |                  |                        |               |
|-----------------------------|------------------|------------------------|---------------|
| CCT (K)                     | 3CCT (30/40/50K) | Beam Angle (°)         | 120°          |
| Lumen (lm)                  | 4,010            | Efficacy (lm)          | 135lm/w@3000K |
| Tested within fixture       | 5,400            | Tested within fixture  | 148lm/w@4000K |
|                             | 6,653            |                        | 140lm/w@5000K |
| Lumen (lm)                  | 4,800            | Efficacy (lm)          | 160lm/w@3000K |
| Tested without fixture      | 6,400            | Tested without fixture | 175lm/w@4000K |
|                             | 8,000            |                        | 165lm/w@5000K |
| CRI                         | >80              |                        |               |

| GENERAL CHARACTERISTICS    |              |
|----------------------------|--------------|
| Operating Temperature (°F) | -40°F ~ 140° |
| Storage Temperature (°F)   | -40°F ~ 140° |
| IP Rating                  | -            |
| IK Rating                  | -            |
| Rated Life (Hrs)           | 50,000       |
| Warranty (Yrs)             | 5            |

| ACCESSORIES |                 |                                           |
|-------------|-----------------|-------------------------------------------|
| Item #      | Stock Code      | Description                               |
| P10374      | MT-RKIT-E26     | E26 Adapter Mount                         |
| P10389      | SPD-L-10KV-277  | Surge Protection 10KV 120-277V            |
| P10390      | SPD-L-20KV-277  | Surge Protection 20KV 120-277V            |
| P10429      | BA-MTM00706227C | 70W Stepdown 480/347V to 277V Transformer |
|             |                 |                                           |

| PRODUCT DIMENSIONS   |             |                                                                                      |
|----------------------|-------------|--------------------------------------------------------------------------------------|
| Width- in / (mm)     | 5.00" 127.5 |  |
| Height- in / (mm)    | 1.80" 45    |                                                                                      |
| Depth- in / (mm)     | 7.00" 177   |                                                                                      |
| EPA (ft²)            | -           |                                                                                      |
| Weight (lbs)         | 3.35        |                                                                                      |
| Mounting Height (ft) | -           |                                                                                      |
| Cable Length (in)    | 18"         |                                                                                      |

| CERTIFICATIONS     |              |      |   |
|--------------------|--------------|------|---|
| UL/ETL             | ETL/cETL     | CEC  |   |
| NSF/ETL Sanitation |              | JA8  |   |
| Energy Star        |              | FCC  | ✓ |
| DLC                | 5.1 Standard | RoHs | ✓ |

| DOCUMENTS |   |             |   |
|-----------|---|-------------|---|
| LM79      | ✓ | IES File    | ✓ |
| LM80      | ✓ | Dimmer List |   |
|           |   |             |   |
|           |   |             |   |

| COMMENTS |
|----------|
|          |