

Version	1.0	Date	8/29/25
Prepared By	JC		

PRODUCT SPECIFICATION			
Category	Flush Mount	PICTURE  *with sensor	
Item Number	9769		
Stock Code	LED7FMC-105L9CCT5-SEN		
Mounting	Ceiling Mount		
Housing Color	White		


ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	15	Replacement Wattage (W)	120
Tested Wattage (W)	-		
Input Voltage (V)	120V	Surge Protect Level	2.5KV
Voltage Frequency (Hz)	50/60		
Input Current (A)	0.143	Dimmable	Yes
Power Factor	>0.9	AUX (12V) Line	-
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	1,050	CCT (K)	CCT5 (27/30/35/40/50K)
Efficacy (lm/w)	70lm/w	Beam Angle (°)	110°
CRI	>90		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-4°F ~ 104°
Storage Temperature (°F)	-40°F ~ 185°
IP Rating	Wet Location
IK Rating	-
Rated Life (Hrs)	35,000
Warranty (Yrs)	3.5

ACCESSORIES		
Item #	Stock Code	Description
7337	BAEM25-170BC/347-C	25W Micro Inverter 120-347V with 12" Conduit
7342	BAEM40-170BC/347-C	Emergency Battery Inverter 40W 120-347V

PRODUCT DIMENSIONS		
Diameter- in / (mm)	3.51"	89
Width- in / (mm)	7.68"	195
Height- in / (mm)	1.50"	38.1
EPA (ft²)	-	
Weight (lbs)		
Mounting Height (ft)	8~15	
Cable Length (ft)	-	

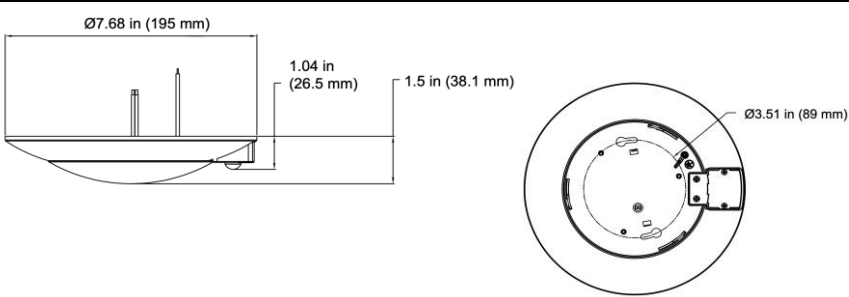

Side View Dimensions: Ø7.68 in (195 mm), 1.04 in (26.5 mm), 1.5 in (38.1 mm)

Top View Dimensions: Ø3.51 in (89 mm)

CERTIFICATIONS			
UL/ETL	ETL/cETL	CEC	
NSF/ETL Sanitation		JA8	✓
Energy Star		FCC	✓
DLC		RoHs	

DOCUMENTS			
LM79		IES File	✓
LM80		Dimmer List	

COMMENTS