

Version	1.0	Date	8/29/25
Prepared By	JC		

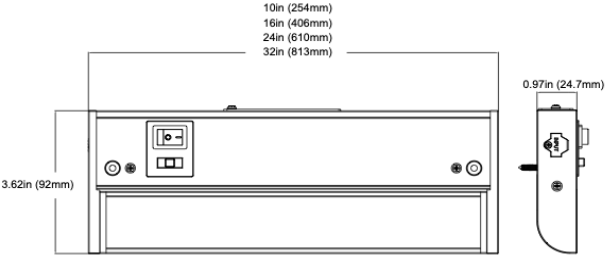
PRODUCT SPECIFICATION			
Category	Under Cabinet 10"	PICTURE 	
Item Number	9770		
Stock Code	FXUC7/10FR/9CCT5		
Mounting	Surface		
Housing Color	White		

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	7	Replacement Wattage (W)	
Tested Wattage (W)	7		
Input Voltage (V)	120V	Surge Protect Level	2.5KV
Voltage Frequency (Hz)	50/60		
Input Current (A)	0.065	Dimmable	Yes
Power Factor	>0.9	AUX (12V) Line	-
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	385	CCT (K)	CCT5 (27/30/35/40/50K)
Efficacy (lm/w)	55lm/w	Beam Angle (°)	Adjustable
CRI	>90		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-4°F ~ 104°
Storage Temperature (°F)	-40°F ~ 185°
IP Rating	IP20
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
P10670	QC-FXUC-6in	6" Quick Connector
P10671	QC-FXUC-12in	12" Quick Connector
P10672	PWC-FXUC-6ft	Power Cable Plug 6ft

PRODUCT DIMENSIONS			
Width- in / (mm)	10"	254	
Height- in / (mm)	0.97"	24.7	
Depth- in / (mm)	3.62"	92	
IK Rating	-		
Weight (lbs)	0.79		
Mounting Height (ft)	-		
Cable Length (ft)	-		

CERTIFICATIONS			
UL/ETL	ETL/cETL	CEC	
NSF/ETL Sanitation		JA8	✓
Energy Star		FCC	✓
DLC		RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80		Dimmer List	✓

COMMENTS