

Version	1.0	Date	8/29/25
Prepared By	JC		

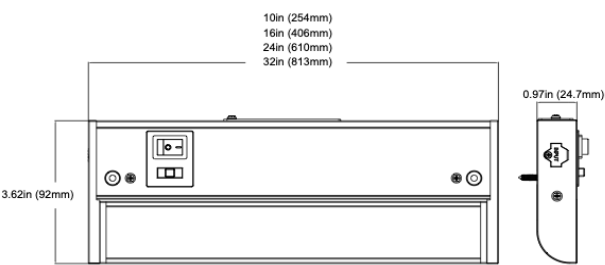
PRODUCT SPECIFICATION			
Category	Under Cabinet 32"	PICTURE 	
Item Number	9773		
Stock Code	FXUC16.5/32FR/9CCT5		
Mounting	Surface		
Housing Color	White		

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	16.5	Replacement Wattage (W)	
Tested Wattage (W)	16.5		
Input Voltage (V)	120V	Surge Protect Level	2.5KV
Voltage Frequency (Hz)	50/60		
Input Current (A)	0.155	Dimmable	Yes
Power Factor	>0.9	AUX (12V) Line	-
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	1,050	CCT (K)	CCT5 (27/30/35/40/50K)
Efficacy (lm/w)	60lm/w	Beam Angle (°)	Adjustable
CRI	>90		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-4°F ~ 104°
Storage Temperature (°F)	-40°F ~ 185°
IP Rating	IP20
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
P10670	QC-FXUC-6in	6" Quick Connector
P10671	QC-FXUC-12in	12" Quick Connector
P10672	PWC-FXUC-6ft	Power Cable Plug 6ft

PRODUCT DIMENSIONS			
Width- in / (mm)	32"	813	
Height- in / (mm)	0.97"	24.7	
Depth- in / (mm)	3.62"	92	
IK Rating	-		
Weight (lbs)	2.12		
Mounting Height (ft)	-		
Cable Length (ft)	-		

CERTIFICATIONS			
UL/ETL	ETL/cETL	CEC	
NSF/ETL Sanitation		JA8	✓
Energy Star		FCC	✓
DLC		RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80		Dimmer List	✓

COMMENTS