

Version	1.0	Date	6/24/25
Prepared By	JC		

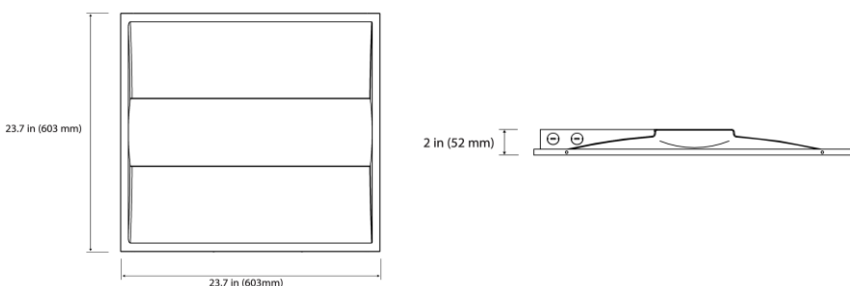
PRODUCT SPECIFICATION			
Category	Troffer		
Item Number	9815		
Stock Code	TF40S/2X2/8C3/TAA		
Mounting	Recessed		
Housing Color	White		
		PICTURE	

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	20/30/40	Replacement Wattage (W)	60-100
Tested Wattage (W)	-		
Input Voltage (V)	120-277V	Surge Protect Level	-
Voltage Frequency (Hz)	50/60	Dimmable	0-10V
Input Current (A)	0.37	AUX (12V) Line	-
Power Factor	>0.9		
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	2,600	CCT (K)	3CCT (35/40/50K)
	3,900		
	5,200		
Efficacy (lm/w)	130	Beam Angle (°)	115°
CRI	>80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-4°F ~ 122°
Storage Temperature (°F)	-4°F ~ 122°
IP Rating	Damp Location
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
7336	BAEM4-60BC/MV-A	4W Emergency Battery 120-277V
7347	BAEM4-55BC/347-A	4W Emergency Battery 120-347V

PRODUCT DIMENSIONS			
Width- in / (mm)	23.7"	603	
Length- in / (mm)	23.7"	603	
Height- in / (mm)	2"	52	
IK Rating	-		
Weight (lbs)	5.1		
Mounting Height (ft)	8~10		
Cable Length (ft)	-		

CERTIFICATIONS			
UL/ETL	ETL/cETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	5.1 Premium	RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	
TAA Compliant	✓		

COMMENTS