

|             |     |      |          |
|-------------|-----|------|----------|
| Version     | 2.1 | Date | 12/23/25 |
| Prepared By | JC  |      |          |

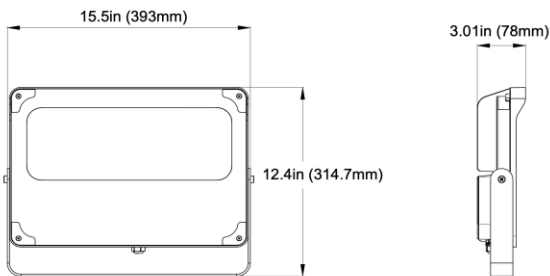
| PRODUCT SPECIFICATION |                       |         |                                                                                     |
|-----------------------|-----------------------|---------|-------------------------------------------------------------------------------------|
| Category              | Flood Light RGBW      |         |                                                                                     |
| Item Number           | 9817                  |         |                                                                                     |
| Stock Code            | FDL200S/77/RGBW/BK-SF |         |                                                                                     |
| Mounting              | Slip Fitter Mount     |         |                                                                                     |
| Housing Color         | Black                 |         |                                                                                     |
|                       |                       | PICTURE |  |

| ELECTRICAL CHARACTERISTICS |             |                         |          |
|----------------------------|-------------|-------------------------|----------|
| Rated Wattage (W)          | 100/150/200 | Replacement Wattage (W) | 175-400  |
| Input Voltage (V)          | 120-277V    |                         |          |
| Voltage Frequency (Hz)     | 50/60       | Surge Protect Level     | 4KV      |
| Input Current (A)          | 0.35        | Dimmable                | 0-10V    |
| Power Factor               | >0.9        | AUX (12V) Line          | -        |
| THD                        | <20%        | Photocell               | Included |

| PHOTOMETRIC CHARACTERISTICS |                |                |                                 |
|-----------------------------|----------------|----------------|---------------------------------|
| Lumen (lm)                  | 25,000 @ 5000K | CCT (K)        | Red, Green, Blue, White (5000K) |
| Efficacy (lm/w)             | 125 @ 5000K    | Beam Angle (°) | 100°                            |
| CRI                         | W: >80         |                |                                 |

| GENERAL CHARACTERISTICS    |               |
|----------------------------|---------------|
| Operating Temperature (°F) | -22°F ~ 122°F |
| Storage Temperature (°F)   | -22°F ~ 158°F |
| IP Rating                  | IP66          |
| IK Rating                  | -             |
| Rated Life (Hrs)           | 50,000        |
| Warranty (Yrs)             | 5             |

| ACCESSORIES |                   |                  |
|-------------|-------------------|------------------|
| Item #      | Stock Code        | Description      |
| P10664      | MT-FDL/YK/15.5/BK | Yoke Mount 15.5" |
| P10665      | CTL-FDL/RGBW      | RGBW Controller  |
|             |                   |                  |
|             |                   |                  |
|             |                   |                  |

| PRODUCT DIMENSIONS   |          |       |                                                                                      |
|----------------------|----------|-------|--------------------------------------------------------------------------------------|
| Width- in / (mm)     | 15.5"    | 393   |  |
| Height- in / (mm)    | 12.40"   | 314.7 |                                                                                      |
| Depth- in / (mm)     | 3.01"    | 78    |                                                                                      |
| EPA (ft²)            |          |       |                                                                                      |
| Weight (lbs)         | 11       |       |                                                                                      |
| Mounting Height (ft) | -        |       |                                                                                      |
| Cable Length (in)    | 24"/2-ft |       |                                                                                      |

| CERTIFICATIONS     |          |      |   |
|--------------------|----------|------|---|
| UL/ETL             | ETL/cETL | CEC  |   |
| NSF/ETL Sanitation |          | JA8  |   |
| Energy Star        |          | FCC  | ✓ |
| DLC                |          | RoHs | ✓ |

| DOCUMENTS   |           |          |   |
|-------------|-----------|----------|---|
| LM79        |           | IES File | ✓ |
| LM80        | ✓ (5000K) | T24      |   |
| Dimmer List |           |          |   |
|             |           |          |   |

| COMMENTS |
|----------|
|          |