

Version	2.1	Date	12/23/25
Prepared By	JC		

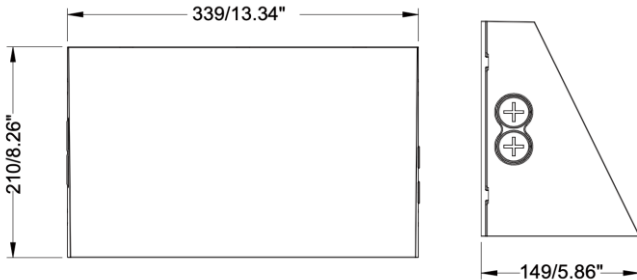
PRODUCT SPECIFICATION			
Category	Full Cut Off Wall Pack		
Item Number	9821		
Stock Code	CWP100S/BS/8C3/BZ-PHO		
Mounting	Wall Mount		
Housing Color	Bronze (RAL 8019)		
		PICTURE	

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	60 / 80 / 100	Replacement Wattage (W)	300
Tested Wattage (W)	60 / 80 / 100		400
Input Voltage (V)	120-277V		500
Voltage Frequency (Hz)	50/60	Surge Protect Level	4KV
Input Current (A)	0.85	Dimmable	0-10V
Power Factor	>0.9	AUX (12V) Line	Yes
THD	<20%	Photocell	Included

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	8,400 11,200 14,000	CCT (K)	CCT3 (30/40/50K)
Efficacy (lm/w)	140	Beam Type	Short/Medium/Long Selectable
CRI	>80	BUG Rating	B3 U0 G2

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-40°F ~ 122°F
Storage Temperature (°F)	-40°F ~ 176°F
IP Rating	IP65
IK Rating	IK08
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
P10591	SEN-HD10VR-PH-1A-AUX	Sensor-Motion 0-10V external 12V PIR

PRODUCT DIMENSIONS			
Width- in / (mm)	13.34" 339		
Height- in / (mm)	8.26" 210		
Depth- in / (mm)	5.86" 149		
EPA (ft²)	0.224		
Weight (lbs)	6.19		
Mounting Height (ft)	16~32		
Cable Length (ft)	-		

CERTIFICATIONS			
UL/ETL	UL/cUL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	5.1 Premium	RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	✓

COMMENTS