

Version	2.0	Date	1/26/25
Prepared By	JC		

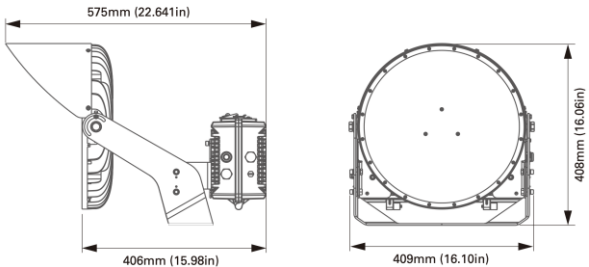
PRODUCT SPECIFICATION			
Category	Sport Light 16" Remote Power System		PICTURE 
Item Number	9839		
Stock Code	SPL16/600S/44/750/BK/480		
Mounting	Yoke Mount		
Housing Color	Black		

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	400/500/600	Replacement Wattage (W)	1000-1500
Tested Wattage (W)	400/500/600		
Input Voltage (V)	277-480V		
Voltage Frequency (Hz)	50/60	Surge Protect Level	20KV
Input Current (A)	1.1	Dimmable	0-10V
Power Factor	>0.9	AUX (12V) Line	Yes
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	60,000 75,000 90,000	CCT (K)	5000K
Efficacy (lm/w)	150	Beam Angle (°)	4x4
CRI	>70		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-40°F ~ 122°F
Storage Temperature (°F)	-40°F ~ 176°F
IP Rating	IP66
Rated Life (Hrs)	50,000
Warranty (Yrs)	7
IK Rating	IK08

ACCESSORIES		
Item #	Stock Code	Description
P10633	MT-SF-SPL-BK-G1	Slip Fitter Mount
P10634	ADP-SF-SPL-BK-G1	Adapter for P10633 for Remote Driver
P10587	PWC-600V3-30FT-QC	Remote Driver DC Cable 30ft w/quick connector
P10676	GSLV-SPL16	Glare shield louver for Sports Light 16"
P10678	LENS-SPL16-3x3	Type 3 Lens for SPL16
P10680	LENS-SPL16-5x5	Type 5 Lens for SPL16
P10305	LASER-SPL/GN	Laser Pointer for SPL

PRODUCT DIMENSIONS			
Width- in / (mm)	16.10" / 409		
Height- in / (mm)	16.06" / 16.06		
Depth- in / (mm)	15.98" / 406		
Depth with shield- in / (mm)	22.64" / 575		
EPA (ft²)	1.43ft²		
Weight (lbs)	35.36		
Mounting Height (ft)	20~50		
Cable Length (ft)	6-ft		

CERTIFICATIONS			
UL/ETL	UL/cUL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	6.0 Premium	RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS
**customize remote driver power cabinet available, please contact us for more information