naturaled®

Version	2.0	Date	8/18/26
Prepared By	J.C		

PRODUCT SPECIFICATION

Category	Stairwell light
Item Number	9841
Stock Code	SWL50S/48FR/8C3-SEN
Mounting	Stair Wall Mount
Housing Color	White

PICTURE



ELECTRICAL CHARACTERISTICS

Rated Wattage (W)	30/40/50W	Replacement Wattage (W)	150W
Tested Wattage (W)	30/40/50W		
Input Voltage (V)	120-277V		
Voltage Frequency (Hz)	50/60HZ	Surge Protect Level	2KV
Input Current (A)	0.458A	Dimmable	0-10V
Power Factor	>0.9	AUX (12V) Line	YES
THD	<20%		

PHOTOMETRIC CHARACTERISTICS

Lumen (lm)	3,900 4,200 6,500	CCT (K)	CCT3 3500/4000/5000K
Efficacy (lm/w)	130	Beam Angle (°)	120
CRI	80		

GENERAL CHARACTERISTICS


Operating Temperature (°F)	-4°F to 113°F
Storage Temperature (°F)	-4°F to 113°F
IP Rating	IP20
IK Rating	-
Rated Life	50000 hrs.
Warranty	5 Years

ACCESSORIES

Item #	Stock Code	Description
P10590	SEN-HD027VCR	Microwave 12V sensor (Built-in) *
P10323	SEN-HD06R	Remote programmer for P10590
P10629	SEN-MW-PSC-BL-U-FM-DC0	Ultrasonic Sensor - Dimming
7347	BAEM4-55BC/347-A	4W CEC-Compliant LED Emergency Driver 120-347V

PRODUCT DIMENSIONS

Depth- in (mm)	4.8	122
Height- in (mm)	5.43	138
Length- in (mm)	47.87	1216
EPA (ft²)	-	
Weight (lbs)	5.5	
Mounting Height (ft)	6~8	
Cable Length (ft)	-	

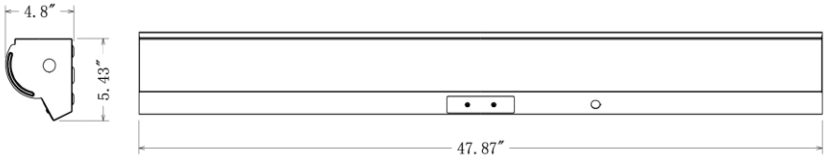

CERTIFICATIONS

UL/ETL	ETL/cETL	CEC	
NSF / ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	6.0 Premium	RoHs	✓

DOCUMENTS

LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS

***Sensor Default Setting:**

Detection Range: 100% / Hold Time: 5min / Light Control: Disable

Standby Light Level:30% / Standby time: infinity

naturaLED © For informational purposes only. Specifications Subject to Change Without Notice