

Version	1.0	Date	8/12/26
Prepared By	JC		

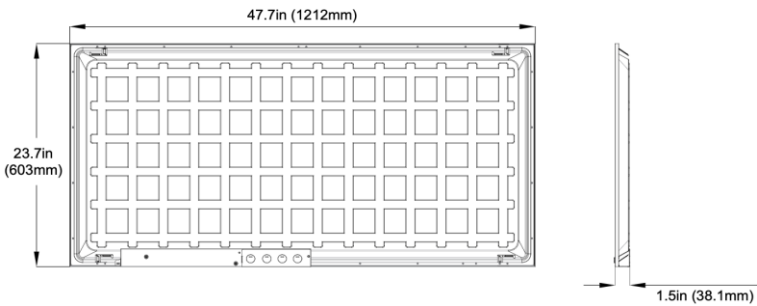
PRODUCT SPECIFICATION			
Category	Backlit Panel		
Item Number	9847AUX		
Stock Code	PNL50S/2X4/8C3-AUX		
Mounting	Recessed		
Housing Color	White		
		PICTURE	

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	30 / 40 / 50	Replacement Wattage (W)	120-130
Tested Wattage (W)	-		
Input Voltage (V)	120-277V	Surge Protect Level	2KV
Voltage Frequency (Hz)	50/60		
Input Current (A)	0.458	Dimmable	0-10V
Power Factor	>0.9	AUX (12V) Line	Yes
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	3,600	CCT (K)	3CCT (35/40/50K)
	4,800		
	6,000		
Efficacy (lm/w)	120	Beam Angle (°)	110°
CRI	>80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-4°F ~ 104°
Storage Temperature (°F)	-40°F ~ 185°
IP Rating	IP20
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
P10701	SEN-ANT-1P-4T-R2-AUX	AUX PIR 0-10V Sensor w/Daylight Harvesting
P10703	SEN-BRI-DT301P-LV-R2	Ceiling PIR 0-10V Sensor w/Daylight Harvesting
P10632	SEN-BRI-RC200	Remote programmer for P10701/P10703
7350	BAEM8-PNL-170BC/MV-SLD-A	8W SLD Panel Emergency Invertor 120-277V

PRODUCT DIMENSIONS			
Length- in / (mm)	47.7"	1212	
Width- in / (mm)	23.7"	603	
Height- in / (mm)	1.5"	38.1	
IK Rating	-		
Weight (lbs)	-		
Mounting Height (ft)	8~20		
Cable Length (ft)	-		

CERTIFICATIONS			
UL/ETL	UL/cUL	CEC	
NSF/ETL Sanitation	ETL Sanitation	JA8	
Energy Star		FCC	✓
DLC	6.0 Standard	RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS