naturaled®

PROJECT:	
SCHEDULE:	**DATE:**
PREPARE BY:	
NOTES:	

EX/ EM EMERGENCY EXIT SIGNS & LIGHT

DESCRIPTION

naturaLED® featuring Bi-Color Emergency Exit Signs and Dual Head Emergency light. Injection-molded thermoplastic ABS housing. Easy to install, long-lasting LED light with test switch and charge indicator light. UL 94V-0 flame rated with up to 2 year warranty.



#7521



#7528


#P10689

APPLICATIONS

Emergency Exit, Emergency Lighting


#7522


#9826

Rated Life 50,000 Hours
Warranty 2 Years

FEATURES

- UL924 Listed
- IP20/22 Rated (Indoor only)
- Voltage:120/277V
- Battery: Ni-Cad 3.6V 1000mAh
- Adjustable heads / 1.2W Per head (Dual Head)
- Operating Temperature: 32°F ~ 104°F
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- Innovation, easy installation
- Suitable for wall mount & ceiling mount (Dual Head)
- Suitable for wall mount & J-Box ceiling mount, Single or double faces (for Both Emergency Exit Signs)
- Maximum 24 hours for full recharge time
- Test switch and charge indicator
- Warranty: 2 years
- Rated Life Hours: 50,000
- Optional Remote Head: For #7528 only

SAMPLE NUMBER LEDEX-GRN/RED-WH

STYLE	TYPE	COLORS	HOUSING COLOR
LED	EX	GRN/RED	WH
LED Lighting	Emergency Exit Sign	Green/ Red	White

© 2026 naturaLED® All rights reserved | www.naturaLED.com | Toll-Free: 855.758.7009 | For informational purposes only. Content is subject to change without notice.

ORDERING

Watts (W)	Ordering Code	Description	Lumens	Voltage	Input Current (A)	Built-in Battery	Charing Time	Emergency Run Time
1	**7521**	LEDEX-GRN/RED-WH	-	120/277V	0.09A(max)	1.2V-1000mAH	24-hrs	90-min
3.5	**7528**	LEDEX-EMFD-GRN/RED-WH	>180	120/277V	0.031A(max)	1.2V-1000mAH	24-hrs	90-min
2	**7522**	LEDEM-FD-WH	240	120/277V	0.09A(max)	3.6V-1000mAH	24-hrs	90-min
3	**9826**	LEDEM-FD-RC-WH	-	120/277V	0.025A(max)	3.6V-2000mAH	24-hrs	90-min

ACCESSORY




Remote Flood Light


P10689 LEDEM-FDS-REMOTE-GR
(Emergency Flood Light Remote Head
for #7528 & #9826 Model Only)

DIMENSIONS


1W (EX)
Weight: 1.76-lbs

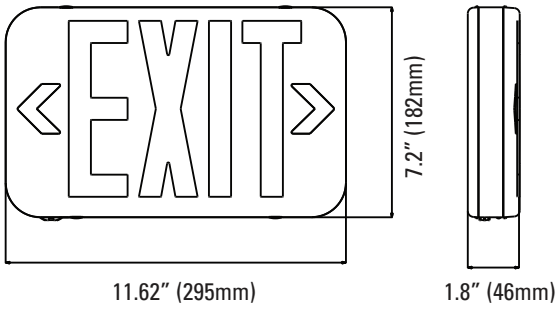


3.5W (EX)
Weight: 3.33-lbs

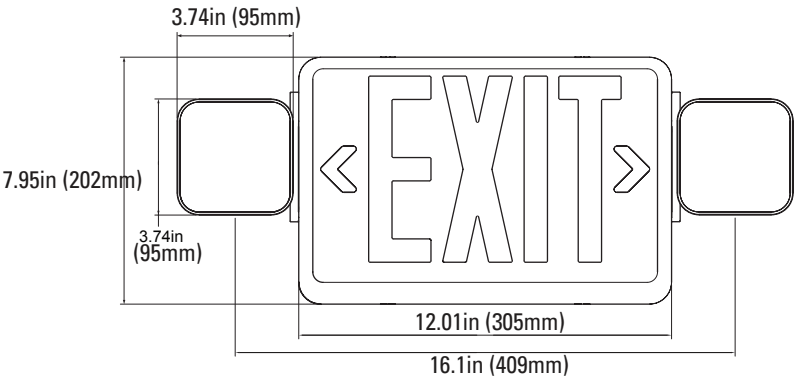

WIRING

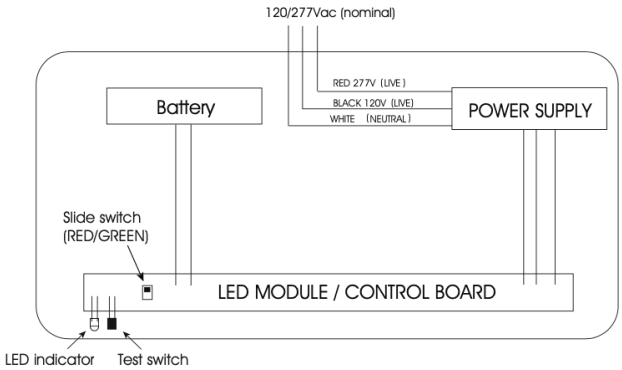

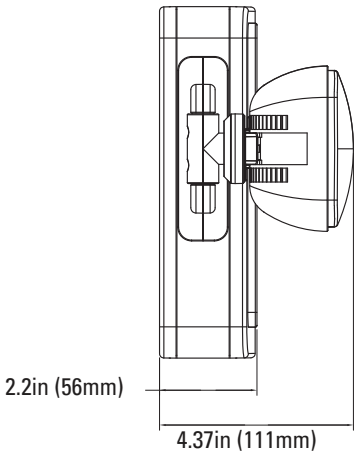


© 2026 naturaLED® All rights reserved | www.naturaLED.com | Toll-Free: 855.758.7009 | For informational purposes only. Content is subject to change without notice.


DIMENSIONS

2W (EM)

Weight: 1.00-lbs

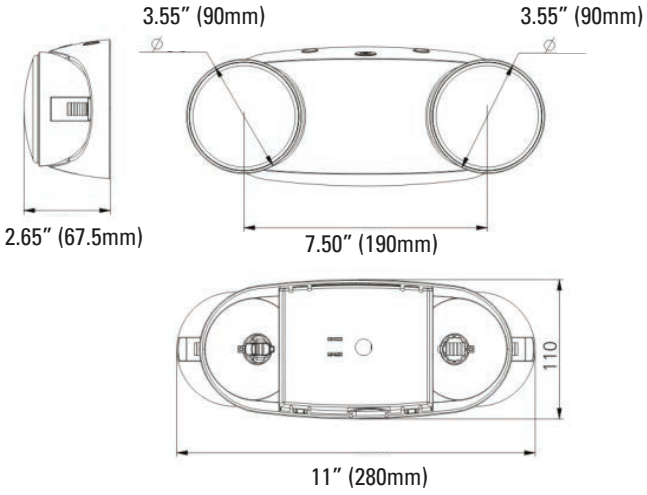


WIRING

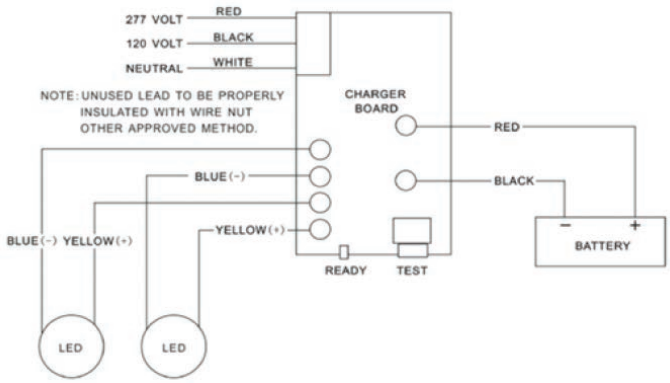


3W (EM)

Weight: 1.06-lbs

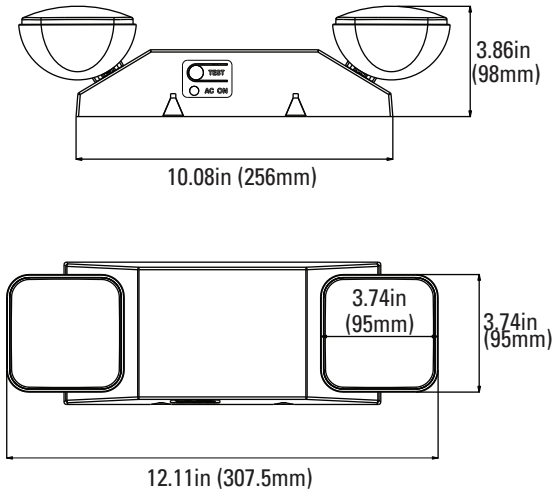


WIRING

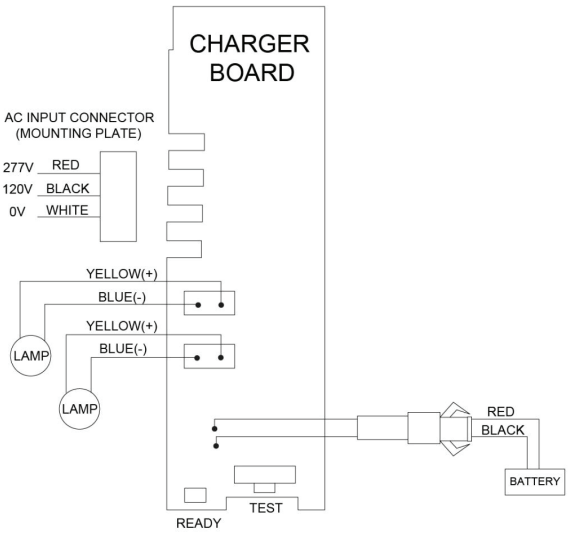


© 2026 naturaLED® All rights reserved | www.naturaLED.com | Toll-Free: 855.758.7009 | For informational purposes only. Content is subject to change without notice.

DIMENSIONS

1W (EM) Remote Head
Weight: 0.5-lbs

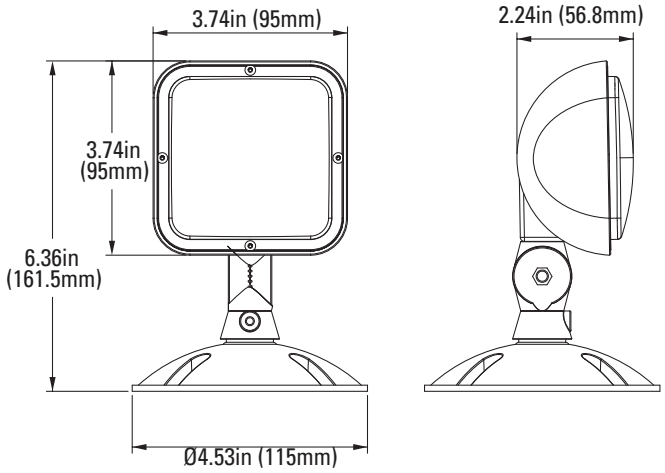


WIRING

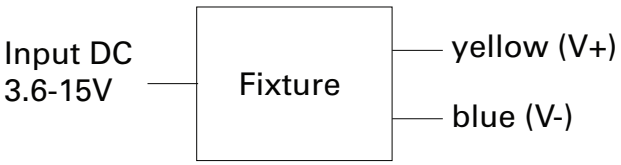


PACKAGE

	Master Carton (pc)	Dimensions (in)	Weight (lb)
7521	6	15.2”x12.4”x8.5”	12.35
7528	6	19.7”x17.3”x15.2”	24.9
7522	6	11.81”x9.45”x9.84”	8.82
9826	6	16.02“x12.8”x9.06”	10.58
P10689	12	14.76”x9.92”x14.17”	9.70

Case Qty
6 pcs

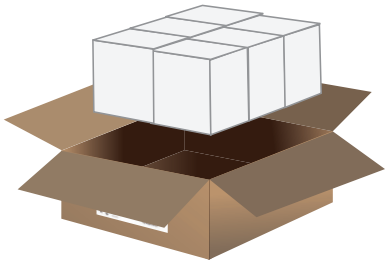

12 pcs

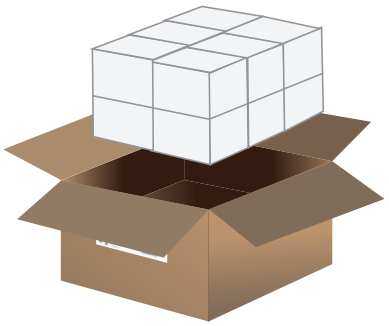

© 2026 naturaLED® All rights reserved | www.naturaLED.com | Toll-Free: 855.758.7009 | For informational purposes only. Content is subject to change without notice.