

Version	2.0	Date	12/13/24
Prepared By	JC		

PRODUCT SPECIFICATION	
Category	Vapor Tight Jelly Jar
Item Number	9544
Stock Code	VTJ20S/8C3/GY/MV-PHO
Mounting	Ceiling/Wall
Housing Color	Gray (RAL 7004)




ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	10/15/20	Replacement Wattage (W)	<150
Tested Wattage (W)	-		
Input Voltage (V)	120-277V	Surge Protect Level	4KV
Voltage Frequency (Hz)	50/60		
Input Current (A)	0.18	Dimmable	No
Power Factor	>0.9	AUX (12V) Line	-
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	800	CCT (K)	CCT3 (30/40/50K)
	1,200		
Efficacy (lm/w)	80lm/w@3000K	Beam Angle (°)	210°
	95lm/w@4000K		
	85lm/w@5000K		
CRI	>80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-40°F ~ 122°
Storage Temperature (°F)	-40°F ~ 140°
IP Rating	IP65
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
P10657	LENS-VTJ-RED	Vapor Tight Jelly Jar Glass Lens (Red)

PRODUCT DIMENSIONS		
	Ceiling	Wall
Width- in / (mm)	4.70" (120mm)	4.70" (120mm)
Height- in / (mm)	15.6" (395mm)	12.90" (329mm)
Depth- in / (mm)	4.70" (120mm)	7.13" (181mm)
EPA (ft²)	-	
Weight (lbs)	3.75	
Mounting Height (ft)	-	
Cable Length (ft)	-	

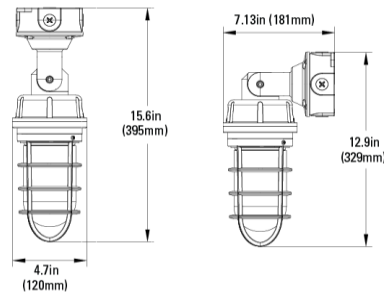

CERTIFICATIONS			
UL/ETL	ETL/cETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC		RoHs	✓

DOCUMENTS			
LM79		IES File	✓
LM80	✓	Dimmer List	

COMMENTS