

Version	2.0	Date	8/29/25
Prepared By	JC		

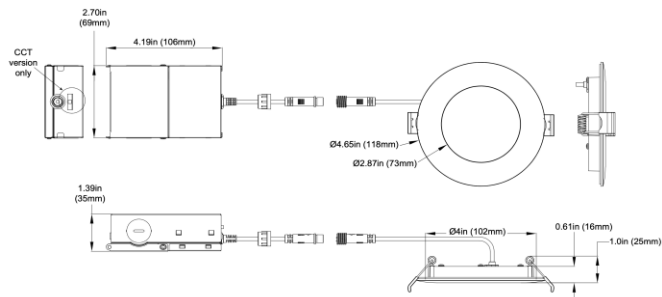
PRODUCT SPECIFICATION			
Category	Disk Light Round	PICTURE	
Item Number	9776		
Stock Code	LED4DLR-66L9CCT5		
Mounting	4" Recessed		
Housing Color	White		

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	8	Replacement Wattage (W)	60
Tested Wattage (W)	8		
Input Voltage (V)	120V	Surge Protect Level	2.5KV
Voltage Frequency (Hz)	60		
Input Current (A)	0.08	Dimmable	Yes
Power Factor	>0.9	AUX (12V) Line	-
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	660	CCT (K)	CCT5 (27/30/35/40/50K)
Efficacy (lm/w)	60lm/w	Beam Angle (°)	110
CRI	>90		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	5 °F ~ 104°
Storage Temperature (°F)	-40°F ~ 140°
IP Rating	Wet Location
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
7337	BAEM25-170BC/347-C	25W Micro Inverter 120-347V with 12" Conduit
7342	BAEM40-170BC/347-C	40W EM Battery Inverter 120-347V

PRODUCT DIMENSIONS		
Diameter Outer- in / (mm)	4.65" 118	
Diameter Inner- in / (mm)	4" 102	
Height- in / (mm)	1.00" 25	
EPA (ft²)	-	
Weight (lbs)	0.9	
Mounting Height (ft)	-	
Cable Length (ft)	-	

CERTIFICATIONS			
UL/ETL	ETL/cETL	CEC	✓
NSF/ETL Sanitation		JA8	✓
Energy Star	✓	FCC	✓
DLC		RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80		Dimmer List	✓

COMMENTS