

Version	2.0	Date	1/26/25
Prepared By	JC		

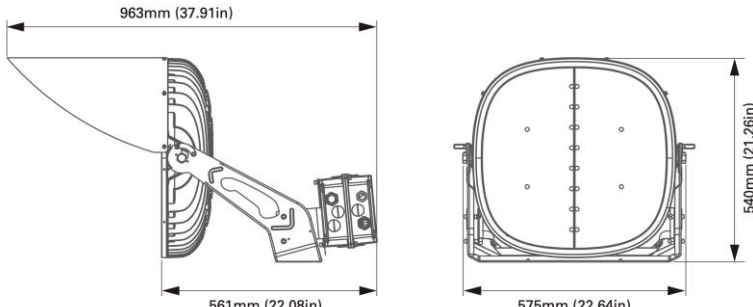
PRODUCT SPECIFICATION			
Category	Sport Light 21" Remote Power System		PICTURE 
Item Number	9840		
Stock Code	SPL21/1300S/33/750/BK/480		
Mounting	Yoke Mount		
Housing Color	Black		

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	1100/1200/1300	Replacement Wattage (W)	<5000
Tested Wattage (W)	1100/1200/1300		
Input Voltage (V)	277-480V		
Voltage Frequency (Hz)	50/60	Surge Protect Level	20KV
Input Current (A)	2.5	Dimmable	0-10V
Power Factor	>0.9	AUX (12V) Line	Yes
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	154,000 168,000 182,000	CCT (K)	5000K
Efficacy (lm/w)	140	Beam Angle (°)	3x3
CRI	>70		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-40°F ~ 122°F
Storage Temperature (°F)	-40°F ~ 176°F
IP Rating	IP66
Rated Life (Hrs)	50,000
Warranty (Yrs)	7
IK Rating	IK08

ACCESSORIES		
Item #	Stock Code	Description
P10587	PWC-600V3-30FT-QC	Remote Driver DC Cable 30ft w/quick connector
P10691	LENS-SPL21-4X4-SET	Type 4 Lens for SPL21

PRODUCT DIMENSIONS			
Width- in / (mm)	22.64"	575	
Height- in / (mm)	21.26"	540	
Depth- in / (mm)	22.08"	561	
Depth with shield- in / (mm)	37.91"	963	
EPA (ft²)	2.86ft²		
Weight (lbs)	70.54		
Mounting Height (ft)	70~90		
Cable Length (ft)	6-ft		

CERTIFICATIONS			
UL/ETL	UL/cUL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	6.0 Premium	RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS
**customize remote driver power cabinet available, please contact us for more information